



**Glass flange,
borosilicate, DN 50 ISO-
KF**

PFEIFFER 

Glass blank flange

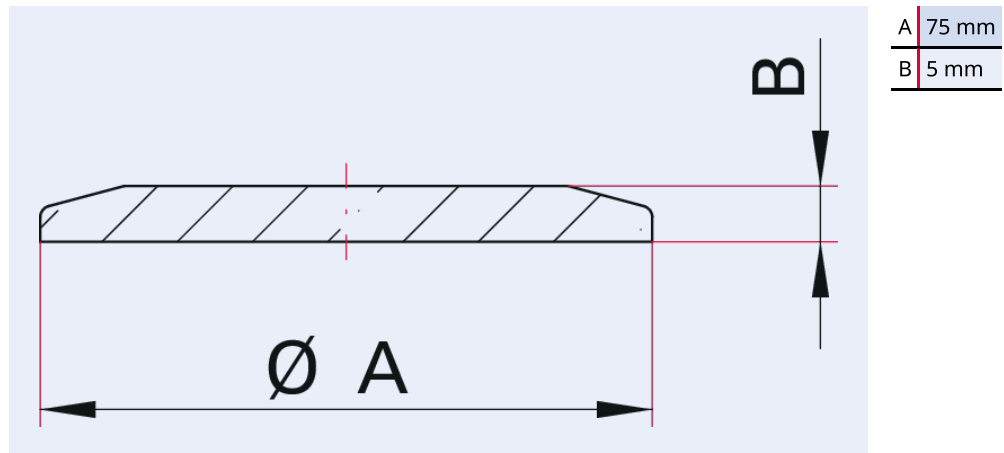


Illustration only

Glass flange, borosilicate, DN 50 ISO-KF

- Installation with outer centering ring and elastomer seal
- Fastening elements: Clamping ring made from plastic (no usage of metal connection elements)
- Caution! Risk of injury by glass splinters. Do not use viewports which show apparent damage

Dimensions



Technical Data

Technical Data	Glass flange, borosilicate, DN 50 ISO-KF
Materials in contact with media	Borosilicate glass
Temperature range	15 – 150 °C
Heat up and cool down rate	≤5 K/min
Connection flange	DN 50 ISO-KF
Pressure range	1 · 10 ⁻⁸ hPa – 5 · 10 ² hPa over pressure
Temperature range max.	150 °C 302 °F 423.15 K
Temperature range min.	15 °C 59 °F 288.15 K

Order number	Glass flange, borosilicate, DN 50 ISO-KF
Glass flange, borosilicate, DN 50 ISO-KF	160FBL050



Errors and/or changes excepted. - 5/14/2025

Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum Components & Solutions GmbH Germany

T +49 551 99963-0

info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>

Follow Us On Social Media

#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 