



**PVC hose with  
embedded spring and  
flanges, PVC with  
stainless steel flange,  
304/1.4301, DN 25 ISO-  
KF**

---



**PFEIFFER** 

# PVC Hose

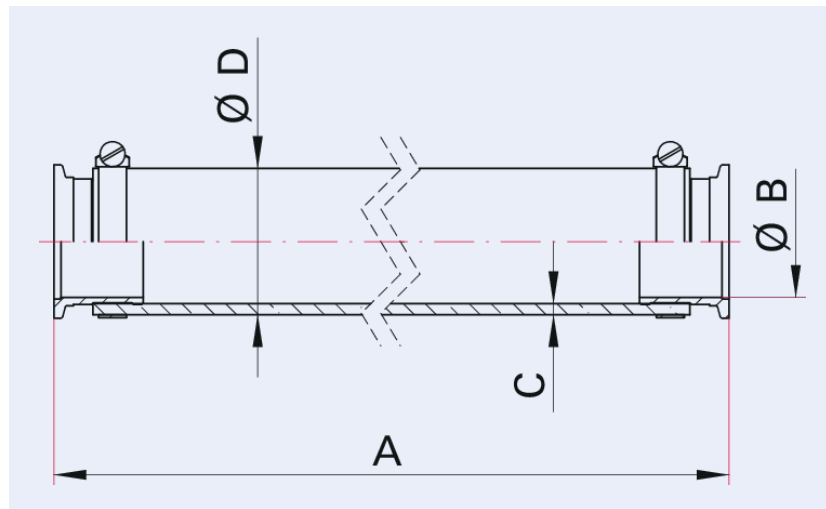


Illustration only

**PVC hose with embedded spring and flanges, PVC with stainless steel flange, 304/1.4301, DN 25 ISO-KF**

- Inner tube: PVC, transparent
- Casing: Steel coil
- Hose cover: PVC, transparent
- Smooth inner and outer walls
- Custom lengths on request

## Dimensions



A	1,000 mm
B	21 mm
C	4 mm
D	33 mm

Technical Data	PVC hose with embedded spring and flanges, PVC with stainless steel flange, 304/1.4301, DN 25 ISO-KF
Materials in contact with media	PVC   Flange: Stainless steel
Temperature range	5 – 40 °C
Bending radius	110 mm   4.33 inch
Connection flange	DN 25 ISO-KF
Pressure range	1 · 10 <sup>-4</sup> hPa – to ambient pressure
Material	PVC
Temperature range max.	40 °C   104 °F   313.15 K
Temperature range min.	5 °C   23 °F   268.15 K

Order number	PVC hose with embedded spring and flanges, PVC with stainless steel flange, 304/1.4301, DN 25 ISO-KF
PVC hose with embedded spring and flanges, PVC with stainless steel flange, 304/1.4301, DN 25 ISO-KF	100SPA025-1000.B

Are you looking for an optimum vacuum solution?  
Talk to us:  
**Pfeiffer Vacuum Components & Solutions GmbH Germany**  
**T +49 551 99963-0**  
**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 