



Clamping ring for elastomer seals, aluminum ADC 12/Steel, DN 10-16 ISO- KF



PFEIFFER 

Clamping ring

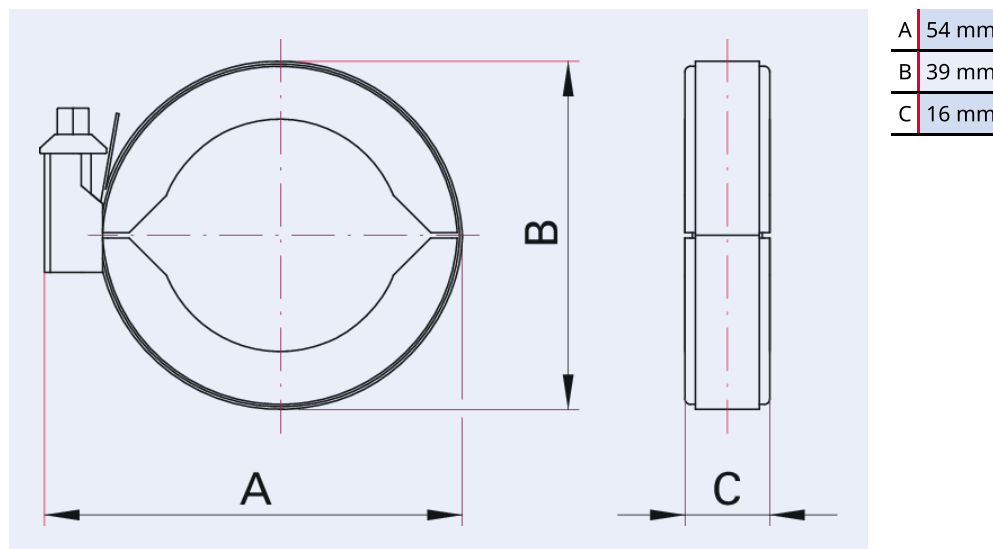


Illustration only

Clamping ring for elastomer seals, aluminum ADC 12/Steel, DN 10-16 ISO-KF

- Suitable for use with elastomer seals
- Compact design
- Screw: Hexagon head; wrench width 7 mm
- Not to be used for the installation of turbo pumps! Use the fastening elements given in the corresponding operating instructions.

Dimensions



Technical Data	Clamping ring for elastomer seals, aluminum ADC 12/Steel, DN 10-16 ISO-KF
Over pressure max.	500 hPa
Temperature range	0 – 100 °C
Overpressure max.	500 hPa 375 Torr 500 mbar
Connection flange	DN 10 – DN 16 ISO-KF
Material	Aluminum ADC 12 / Steel
Temperature range max.	100 °C 212 °F 373.15 K
Temperature range min.	0 °C 32 °F 273.15 K

Order number	Clamping ring for elastomer seals, aluminum ADC 12/Steel, DN 10-16 ISO-KF
Clamping ring for elastomer seals, aluminum ADC 12/Steel, DN 10-16 ISO-KF	110BSB016

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 