



**Viewport, aluminum /
borosilicate glass,
DN 50 ISO-KF**



PFEIFFER 

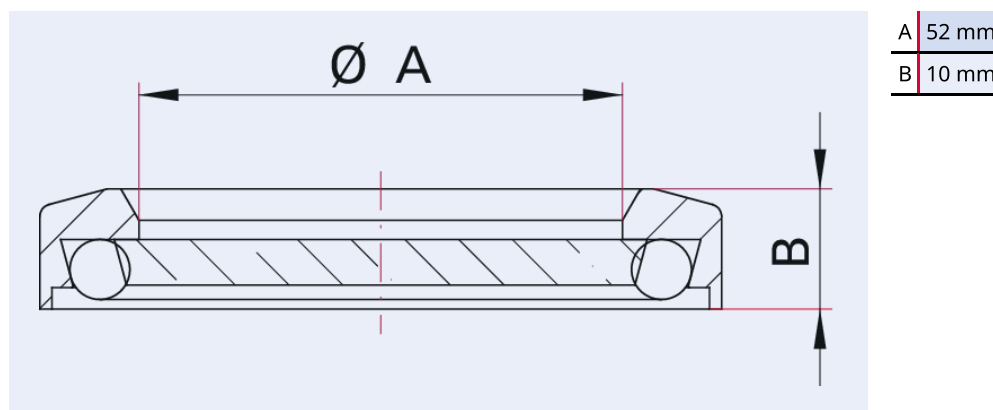


Illustration only

Viewport, aluminum / borosilicate glass, DN 50 ISO-KF

- Aluminum frame with integrated FKM O-ring, installation without additional seal
- Circumferential rim for outer centering on the ISO-KF counter flange
- Not suitable for installation on base plate
- Caution! Risk of injury by glass splinters. Do not use viewports which show apparent damage

Dimensions



Technical Data	Viewport, aluminum / borosilicate glass, DN 50 ISO-KF
Flange, material	Aluminum
Temperature range	15 – 150 °C
Sight glass	Borosilicate glass
Heat up and cool down rate	≤5 K/min
Connection flange	DN 50 ISO-KF
Pressure range	1 · 10 ⁻⁸ hPa – 5 · 10 ² hPa over pressure
Temperature range max.	150 °C 302 °F 423.15 K
Temperature range min.	15 °C 5 °F 258.15 K

Order number	Viewport, aluminum / borosilicate glass, DN 50 ISO-KF
Viewport, aluminum / borosilicate glass, DN 50 ISO-KF	110GSG050

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 