




**Reducer tee, DN 40 ISO-
KF, DN 40-25 ISO-KF,
aluminum EN AW 2011
Pb max. 0,4%**

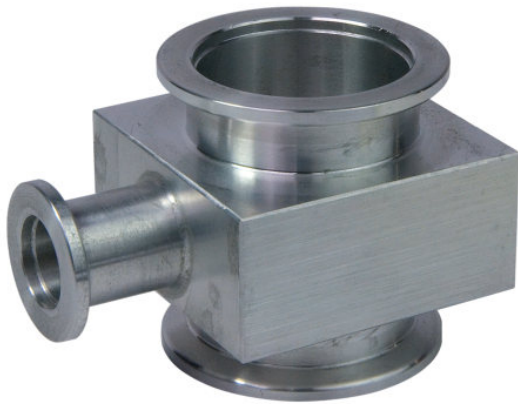

PFEIFFER 


Reducing tee



Illustration only

Reducer tee, DN 40 ISO-KF, DN 40-25 ISO-KF, aluminum EN AW 2011 Pb max. 0,4%

Dimensions

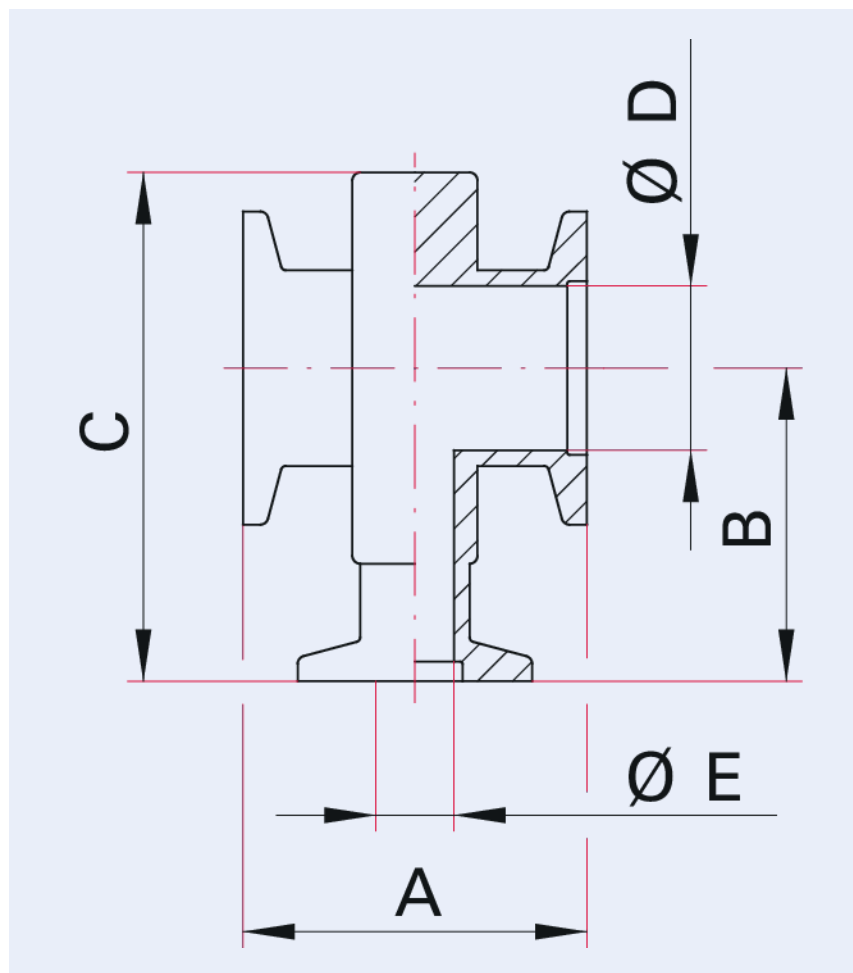

A	59 mm
B	50 mm
C	80 mm
D	40 mm
E	25 mm

Technical Data	Reducer tee, DN 40 ISO-KF, DN 40-25 ISO-KF, aluminum EN AW 2011 Pb max. 0,4%
Materials in contact with media	Aluminum
Nominal diameter reduced	DN 25 ISO-KF
Temperature range	196 – 150 °C
Connection flange	DN 40 ISO-KF – DN 25 ISO-KF
Pressure range	$1 \cdot 10^{-8}$ hPa – $5 \cdot 10^2$ hPa over pressure
Temperature range max.	150 °C 302 °F 423.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Reducer tee, DN 40 ISO-KF, DN 40-25 ISO-KF, aluminum EN AW 2011 Pb max. 0,4%
Reducer tee, DN 40 ISO-KF, DN 40-25 ISO-KF, aluminum EN AW 2011 Pb max. 0,4%	110RTR040-025-V.A

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 