



**Aluminum edged seal,
aluminum EN AW-
6082/3.2315, DN 20-
25 ISO-KF**



PFEIFFER 

Aluminum edged seal

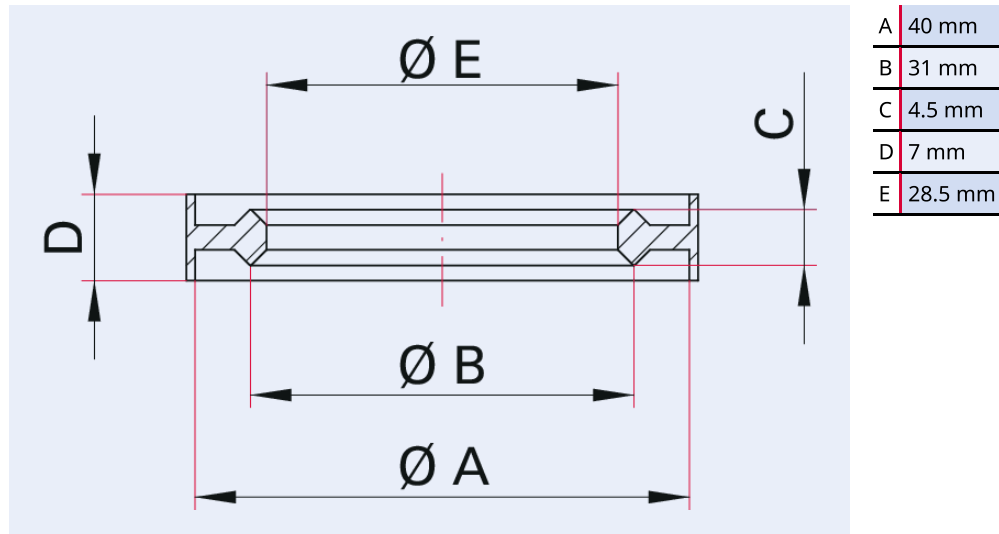


Illustration only

Aluminum edged seal, aluminum EN AW-6082/3.2315, DN 20-25 ISO-KF

- With metal seals a vacuum of 10E-9 hPa can be achieved
- No gas permeation
- For stainless steel flanges
- Fastener: ISO-KF clamp for metal seals
- For single use only

Dimensions



Technical Data	Aluminum edged seal, aluminum EN AW-6082/3.2315, DN 20-25 ISO-KF
Materials in contact with media	Aluminum 3.2315/EN AW-6082
Temperature range	196 – 150 °C
Connection flange	DN 20 – DN 25 ISO-KF
Temperature range max.	150 °C 302 °F 423.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Aluminum edged seal, aluminum EN AW-6082/3.2315, DN 20-25 ISO-KF
Aluminum edged seal, aluminum EN AW-6082/3.2315, DN 20-25 ISO-KF	110ZSK025

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 