



**ISO-KF with Swagelok®
adapter, for pipe
outside diameter 8
mm, DN 25 ISO-KF**

PFEIFFER 

ISO-KF to Swagelok® Adapter

PFEIFFER ➤

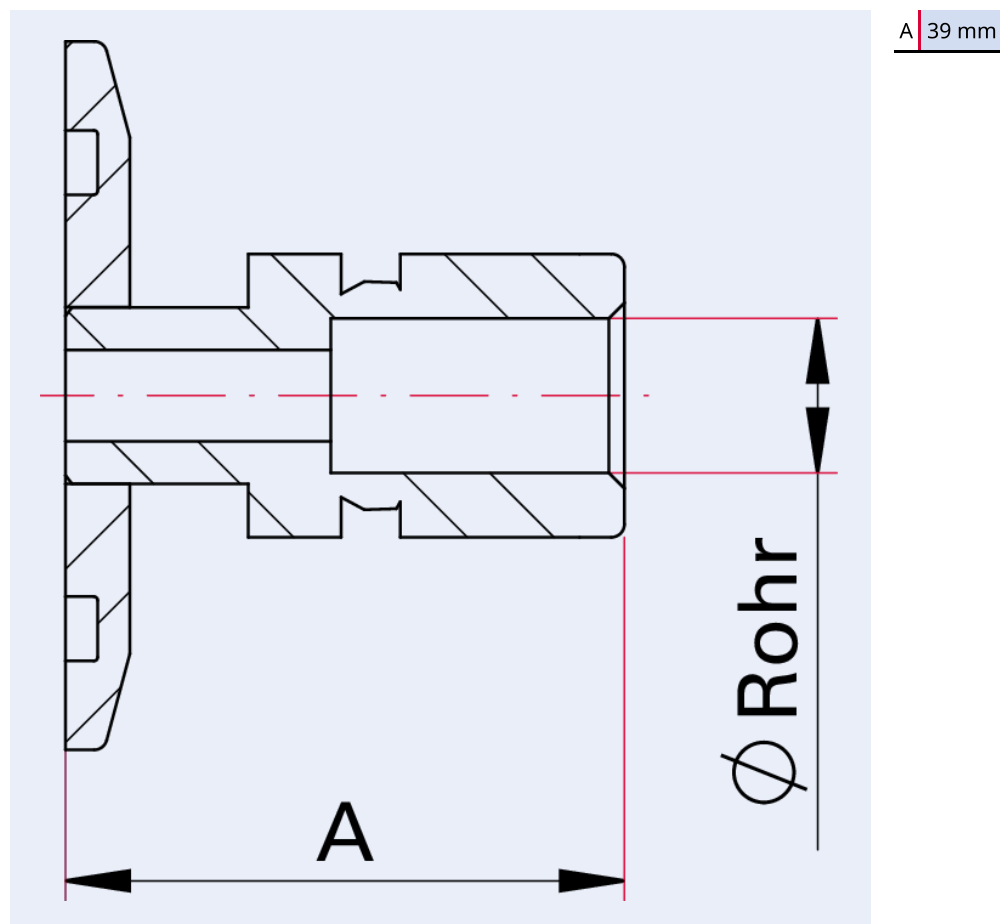


Illustration only

ISO-KF with Swagelok® adapter, for pipe outside diameter 8 mm, DN 25 ISO-KF

- Original Swagelok® clamping collar fitting

Dimensions



Technical Data	ISO-KF with Swagelok® adapter, for pipe outside diameter 8 mm, DN 25 ISO-KF
Materials in contact with media	Stainless steel 1.4301 (AISI 304)
Pipe external diameter	8 mm
Temperature range	196 – 300 °C
Connection flange	DN 25 ISO-KF
Pressure range	1 · 10 ⁻⁸ hPa – 5 · 10 ² hPa over pressure (elastomer seal); 1 · 10 ⁻⁹ hPa – 5 · 10 ² hPa over pressure (metal seal)
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	ISO-KF with Swagelok® adapter, for pipe outside diameter 8 mm, DN 25 ISO-KF
ISO-KF with Swagelok® adapter, for pipe outside diameter 8 mm, DN 25 ISO-KF	120ASW025-8

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 