



**VCR-adapter, female,
stainless steel
304/1.4301, DN 25 ISO-
KF**



PFEIFFER 

VCR adapter, female

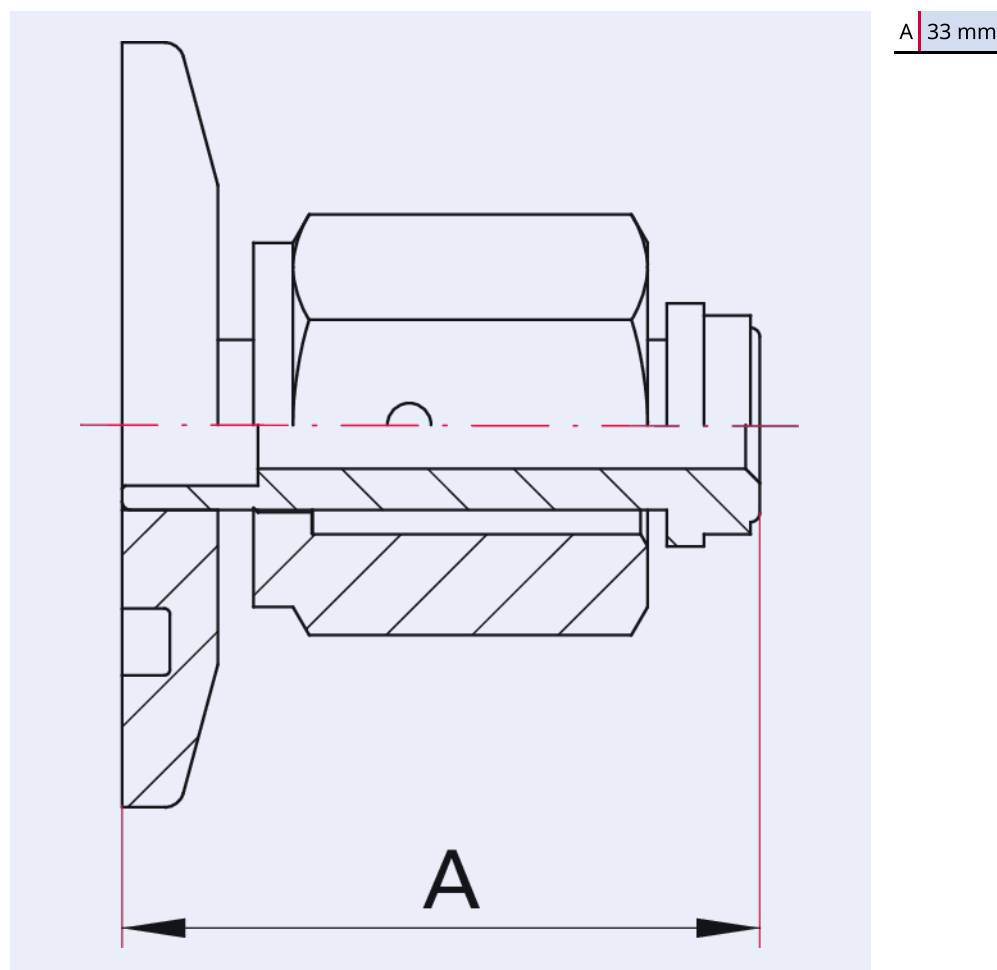


Illustration only

VCR-adapter, female, stainless steel 304/1.4301, DN 25 ISO-KF

- Original Swagelok® VCR adapter

Dimensions



Technical Data	VCR-adapter, female, stainless steel 304/1.4301, DN 25 ISO-KF
Materials in contact with media	Stainless steel 1.4301 (AISI 304) Stainless steel 1.4401 (AISI 316)
VCR connection	1/4"
Temperature range	196 – 300 °C
Connection flange	DN 25 ISO-KF / G 1 1/4" VCR
Pressure range	1 · 10 ⁻⁸ hPa – 5 · 10 ⁻² hPa over pressure (elastomer seal); 1 · 10 ⁻⁹ hPa – 5 · 10 ⁻² hPa over pressure (metal seal)
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	VCR-adapter, female, stainless steel 304/1.4301, DN 25 ISO-KF
VCR-adapter, female, stainless steel 304/1.4301, DN 25 ISO-KF	120AVF025-0250

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 