



Hingeless clamping ring, stainless steel 304/1.4301, DN 20- 25 ISO-KF



PFEIFFER 

Clamping ring

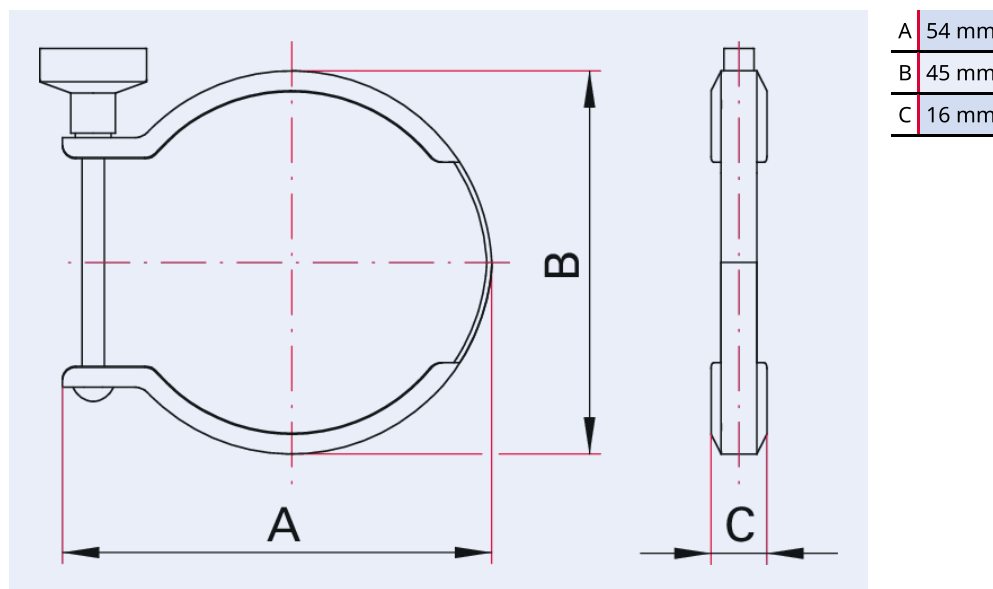


Illustration only

Hingeless clamping ring, stainless steel 304/1.4301, DN 20-25 ISO-KF

- Suitable for use with elastomer seals
- Compact design
- Not to be used for the installation of turbo pumps! Use the fastening elements given in the corresponding operating instructions.

Dimensions



Technical Data	Hingeless clamping ring, stainless steel 304/1.4301, DN 20-25 ISO-KF
Over pressure max.	500 hPa
Temperature range	10 – 125 °C
Overpressure max.	500 hPa 375 Torr 500 mbar
Connection flange	DN 20 – DN 25 ISO-KF
Torque	2 N m on wingnut
Material	Stainless steel 1.4301/304
Temperature range max.	125 °C 257 °F 398.15 K
Temperature range min.	10 °C 14 °F 263.15 K

Order number	Hingeless clamping ring, stainless steel 304/1.4301, DN 20-25 ISO-KF
Hingeless clamping ring, stainless steel 304/1.4301, DN 20-25 ISO-KF	120BSG025

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 