



**Viewport, stainless
steel / fused silica
(Synthetic amorphous
quartz), UV, DN 40 ISO-
KF**



PFEIFFER 

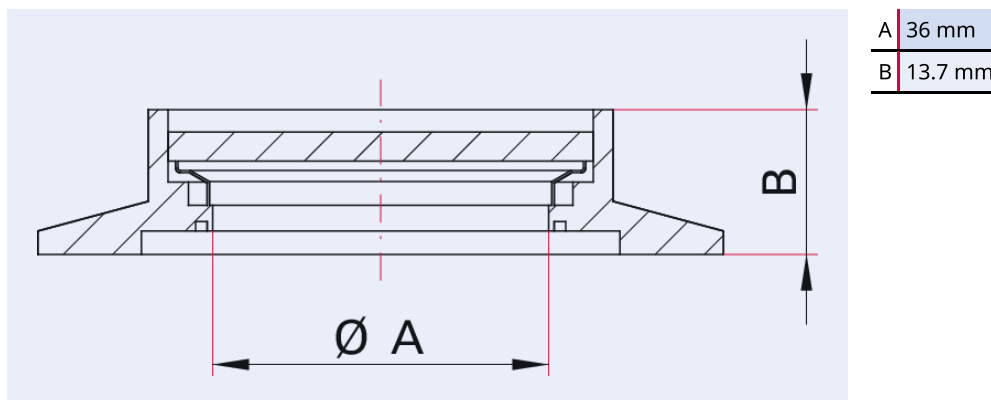


Illustration only

**Viewport, stainless steel / fused silica (Synthetic amorphous quartz), UV,
DN 40 ISO-KF**

- Stainless Steel frame; glass soldered
- Transmission in UV spectrum, up to 200 nm
- Caution! Risk of injury by glass splinters. Do not use viewports which show apparent damage

Dimensions



Technical Data	Viewport, stainless steel / fused silica (Synthetic amorphous quartz), UV, DN 40 ISO-KF
Flange, material	Stainless steel
Temperature range	100 – 200 °C
Sight glass	Fused Silica (synthetic amorphous quartz), UV
Heat up and cool down rate	≤5 K/min
Connection flange	DN 40 ISO-KF
Pressure range	$1 \cdot 10^{-8}$ hPa – $5 \cdot 10^2$ hPa over pressure
Temperature range max.	200 °C 392 °F 473.15 K
Temperature range min.	100 °C 148 °F 173.15 K

Order number	Viewport, stainless steel / fused silica (Synthetic amorphous quartz), UV, DN 40 ISO-KF
Viewport, stainless steel / fused silica (Synthetic amorphous quartz), UV, DN 40 ISO-KF	120GSG040-silica-uv

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 