



**PFEIFFER** 

# Coaxial feedthrough, SHV-5

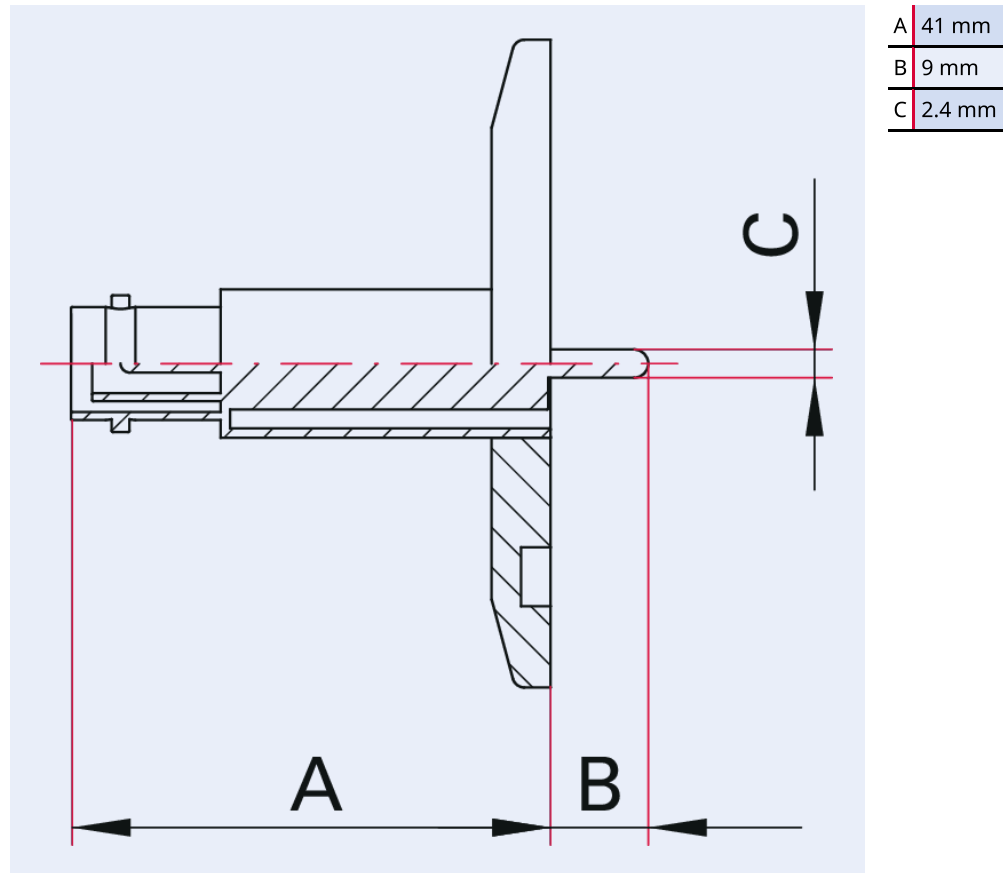


Illustration only

## **Coaxial feedthrough, SHV-5, grounded shield, 1 pin, DN 40 ISO-KF**

- A grounded shield is when the flange respectively the weld lip have the same potential as the shield
- Flange material: Stainless steel
- Including atmosphere sided plug (-65 to 165 °C)
- The specified voltages and currents refer to the following ambient conditions:  
room temperature, outside: dry air, inside: vacuum  $< 1 \cdot 10^{-4}$  hPa

## Dimensions



## Technical Data

Technical Data	Coaxial feedthrough, SHV-5, grounded shield, 1 pin, DN 40 ISO-KF
Materials in contact with media	Flange: Stainless steel
Temperature range (vacuum side)	100 – 300 °C
Screening	Grounded shield
Tightness	1 · 10 <sup>-11</sup> Pa m <sup>3</sup> /s   7.5 · 10 <sup>-11</sup> Torr l/s   1 · 10 <sup>-10</sup> mbar l/s
Heat up and cool down rate	≤25 K/min
Feedthrough voltage	5 kV DC
Current	5 A
Pins	1
Connection flange	DN 40 ISO-KF
Pressure range	1 · 10 <sup>-8</sup> hPa – to ambient pressure

## Order number

Order number	Coaxial feedthrough, SHV-5, grounded shield, 1 pin, DN 40 ISO-KF
Coaxial feedthrough, SHV-5, grounded shield, 1 pin, DN 40 ISO-KF	120XSG040-1

Are you looking for an optimum vacuum solution?  
Talk to us:  
**Pfeiffer Vacuum Components & Solutions GmbH Germany**  
**T +49 551 99963-0**  
**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 