




**Blank flange, stainless
steel 316L/1.4404,
DN 50 ISO-KF**

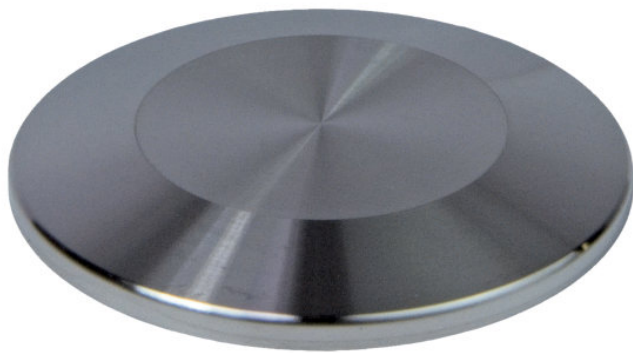

PFEIFFER 

Blank flange





Illustration only

Blank flange, stainless steel 316L/1.4404, DN 50 ISO-KF

- Available in stainless steel or aluminum

Dimensions

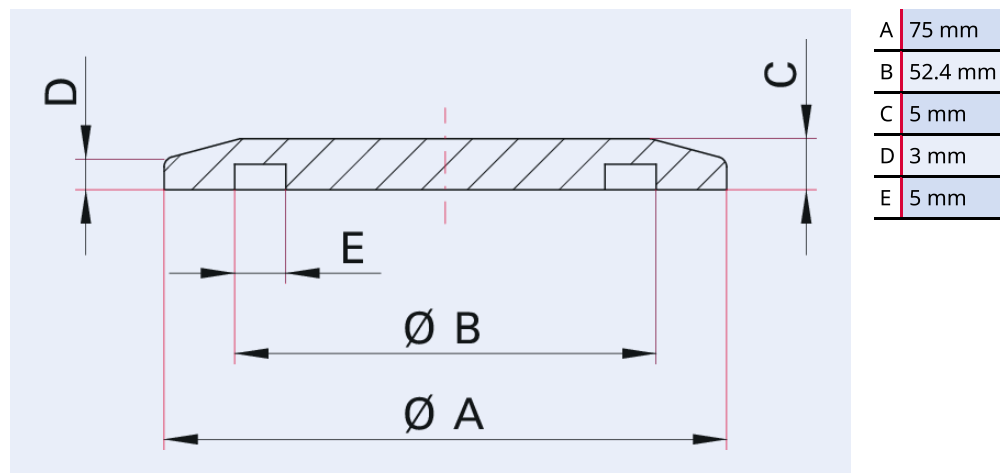

Technical Data

Blank flange, stainless steel 316L/1.4404, DN 50 ISO-KF

Materials in contact with media	Stainless steel 1.4404 (AISI 316L)
Temperature range	196 – 350 °C
Connection flange	DN 50 ISO-KF
Pressure range	1 · 10 ⁻⁸ hPa – 1.5 · 10 ⁻³ hPa over pressure (elastomer seal); 1 · 10 ⁻⁹ hPa – 1.5 · 10 ⁻³ hPa over pressure (metal seal)
Temperature range max.	350 °C 662 °F 623.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Blank flange, stainless steel 316L/1.4404, DN 50 ISO-KF
Blank flange, stainless steel 316L/1.4404, DN 50 ISO-KF	170FBL050

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 