


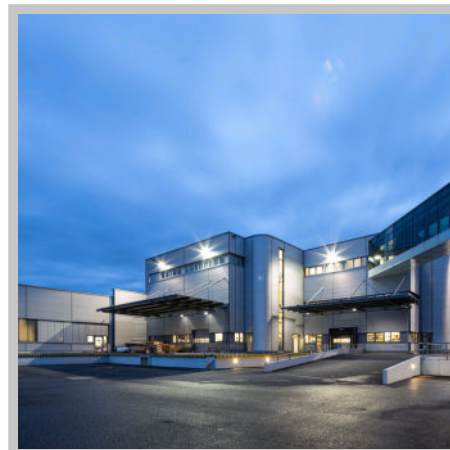

A red pole with many white directional signs pointing in various directions, each displaying a distance in kilometers. The signs are arranged in a circular pattern around the pole, with distances ranging from 561 km to 9,658 km. The background shows a clear blue sky and a modern building.

PFEIFFER 

Reducing piece, conical

PFEIFFER 

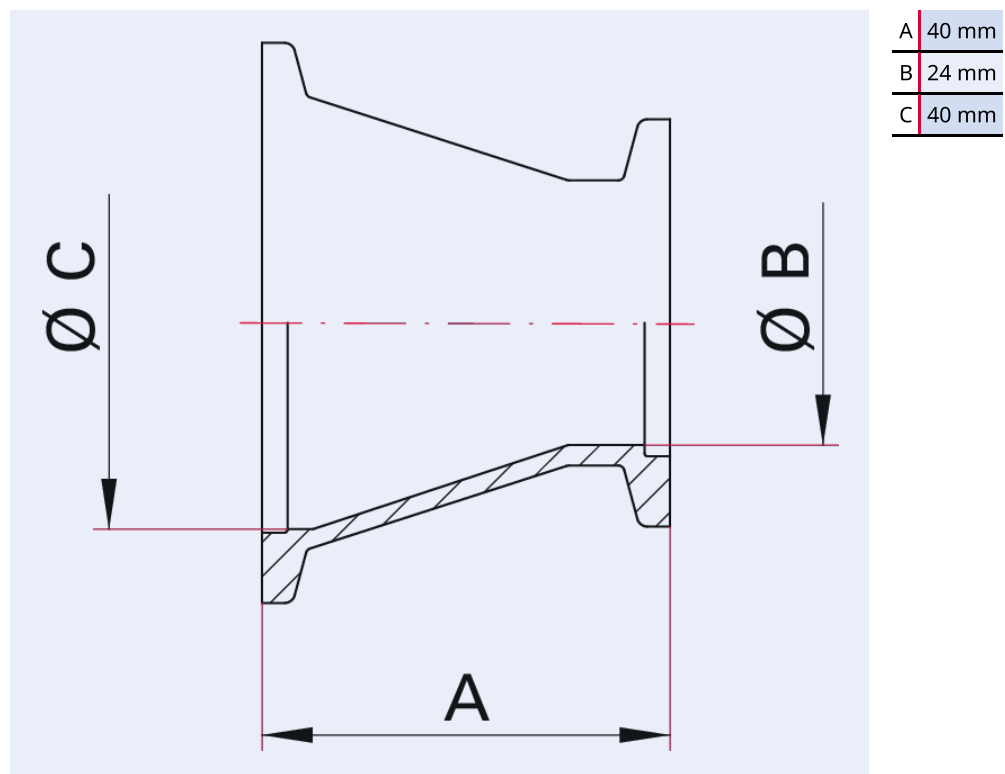


Illustration only

Conical reducing piece, stainless steel 316L/1.4404, DN 40-25 ISO-KF

- Flanges according to DIN 28403 and ISO 2861

Dimensions



Technical Data	Conical reducing piece, stainless steel 316L/1.4404, DN 40-25 ISO-KF
Materials in contact with media	Stainless steel 1.4404 (AISI 316L)
Nominal diameter reduced	DN 25 ISO-KF
Temperature range	196 – 350 °C
Connection flange	DN 40 ISO-KF – DN 25 ISO-KF
Pressure range	1 · 10 ⁻⁸ hPa – 5 · 10 ² hPa over pressure (elastomer seal); 1 · 10 ⁻⁹ hPa – 5 · 10 ² hPa over pressure (metal seal)
Temperature range max.	350 °C 662 °F 623.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Conical reducing piece, stainless steel 316L/1.4404, DN 40-25 ISO-KF
Conical reducing piece, stainless steel 316L/1.4404, DN 40-25 ISO-KF	170RRK040-025-40

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 