



**Bellows, stainless steel:
flange 304/1.4301;
bellows 316L, DN 16, 60
mm**



PFEIFFER 

Spring bellows

PFEIFFER 

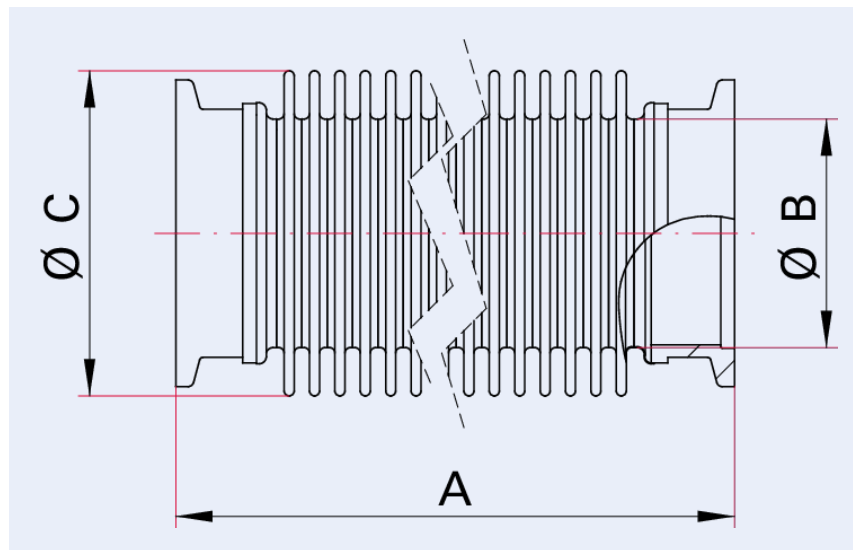


Illustration only

Bellows, stainless steel: flange 304/1.4301; bellows 316L, DN 16, 60 mm

- Flange connection length 15 mm
- Custom lengths on request

Dimensions



A	60 mm
B	16 mm
C	26 mm

Technical Data	Bellows, stainless steel: flange 304/1.4301; bellows 316L, DN 16, 60 mm
Temperature range	196 – 300 °C
Axial stroke	±3.5 mm ±0.14 inch
Tightness	1 · 10 ⁻¹¹ Pa m ³ /s 7.5 · 10 ⁻¹¹ Torr l/s 1 · 10 ⁻¹⁰ mbar l/s
Connection flange	DN 16 ISO-KF
Pressure range	1 · 10 ⁻⁸ hPa – 5 · 10 ² hPa over pressure
Material	Flange: stainless steel 1.4301/304; bellows: stainless steel 316L
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Bellows, stainless steel: flange 304/1.4301; bellows 316L, DN 16, 60 mm
Bellows, stainless steel: flange 304/1.4301; bellows 316L, DN 16, 60 mm	170SFK016-060

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 