




**Bracket screw,
aluminum EN AW-6061;
screw: stainless steel
A2-70, DN 320-500 ISO-K**

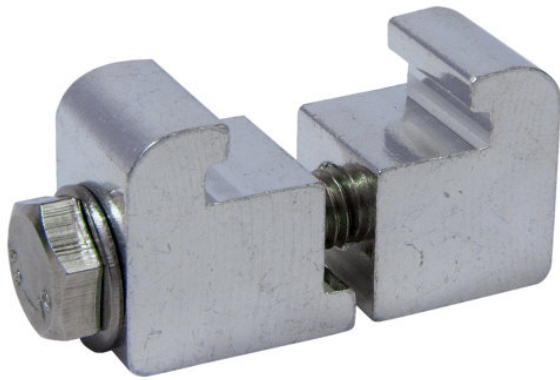

PFEIFFER 

Bracket screw





Illustration only

Bracket screw, aluminum EN AW-6061; screw: stainless steel A2-70, DN 320-500 ISO-K

- Suitable for use with elastomer seals
- Not to be used for the installation of turbo pumps! Use the fastening elements given in the corresponding operating instructions.

Dimensions

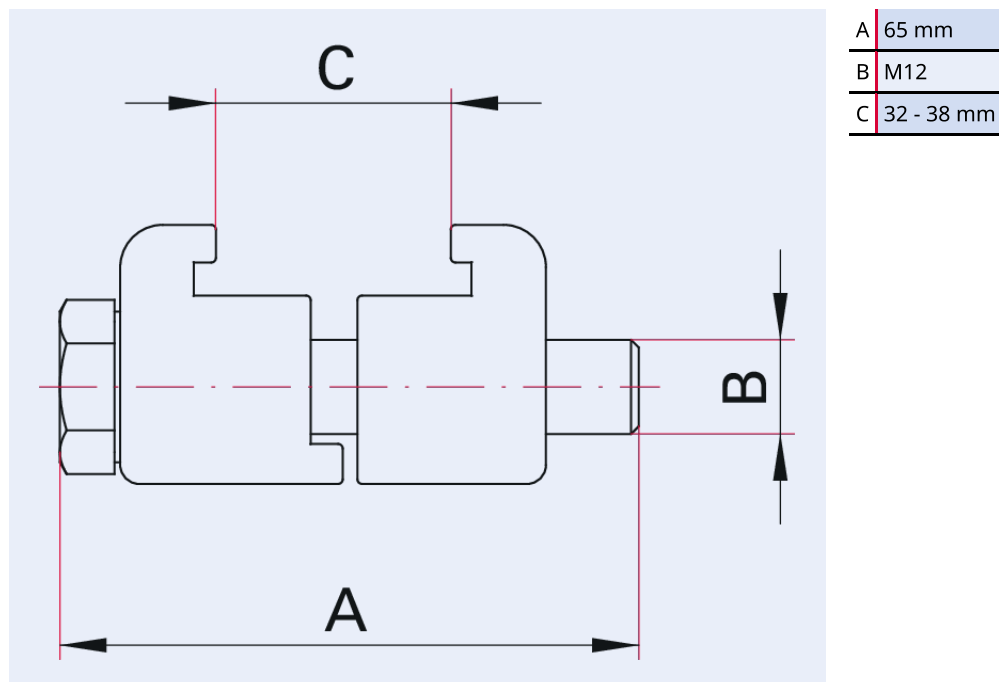

Technical Data	Bracket screw, aluminum EN AW-6061; screw: stainless steel A2-70, DN 320-500 ISO-K
Temperature range	196 – 200 °C
Connection flange	DN 320 ISO-K
Material	Aluminum EN AW-6061; screw: stainless steel A2-70
Temperature range max.	200 °C 392 °F 473.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Bracket screw, aluminum EN AW-6061; screw: stainless steel A2-70, DN 320-500 ISO-K
Bracket screw, aluminum EN AW-6061; screw: stainless steel A2-70, DN 320-500 ISO-K	310BKL500

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 