




**Blank flange, aluminum
EN AW-6082,
DN 250 ISO-K**

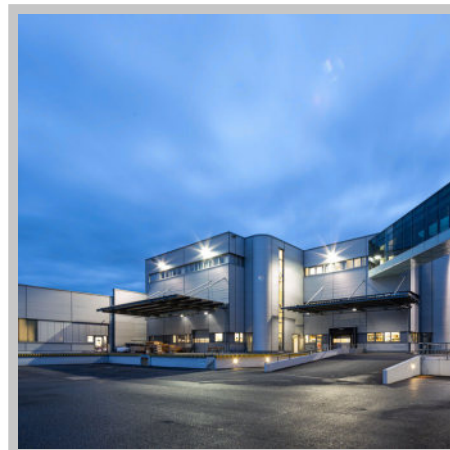

PFEIFFER 


Blank flange



Illustration only

Blank flange, aluminum EN AW-6082, DN 250 ISO-K

Dimensions

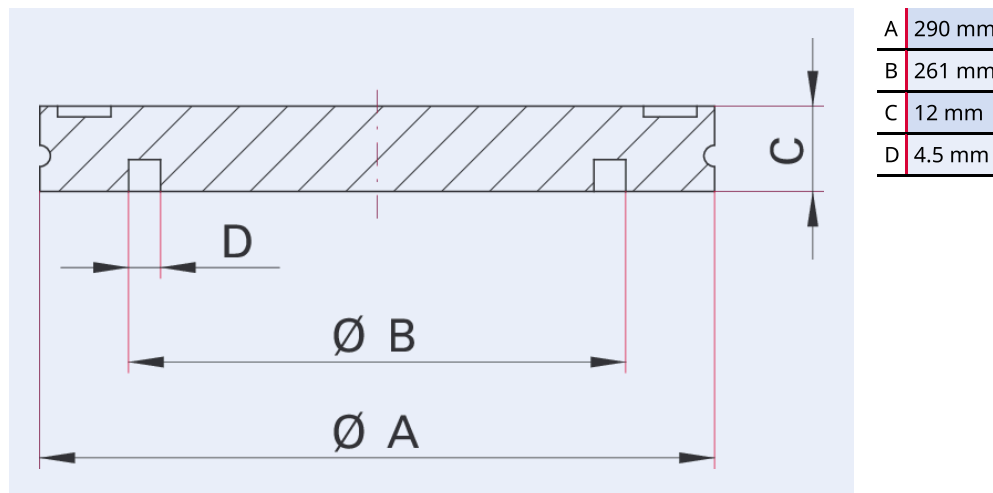

Technical Data

Technical Data	Blank flange, aluminum EN AW-6082, DN 250 ISO-K
Materials in contact with media	Aluminum EN AW-6082
Temperature range	196 – 200 °C
Connection flange	DN 250 ISO-K
Pressure range	1 · 10 ⁻⁸ hPa – 1.5 · 10 ³ hPa over pressure
Material	Aluminum
Temperature range max.	200 °C 392 °F 473.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number

Order number	Blank flange, aluminum EN AW-6082, DN 250 ISO-K
Blank flange, aluminum EN AW-6082, DN 250 ISO-K	310FBL250

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 