



**Adapter flange,
stainless steel
304/1.4301, DN 200 ISO-
K/100 ISO-F**

PFEIFFER 

Reducing flange





Illustration only

Adapter flange, stainless steel 304/1.4301, DN 200 ISO-K/100 ISO-F

- Other nominal diameters and dimensions on request
- Reduced nominal width implemented with ISO-F blind hole threads

Dimensions

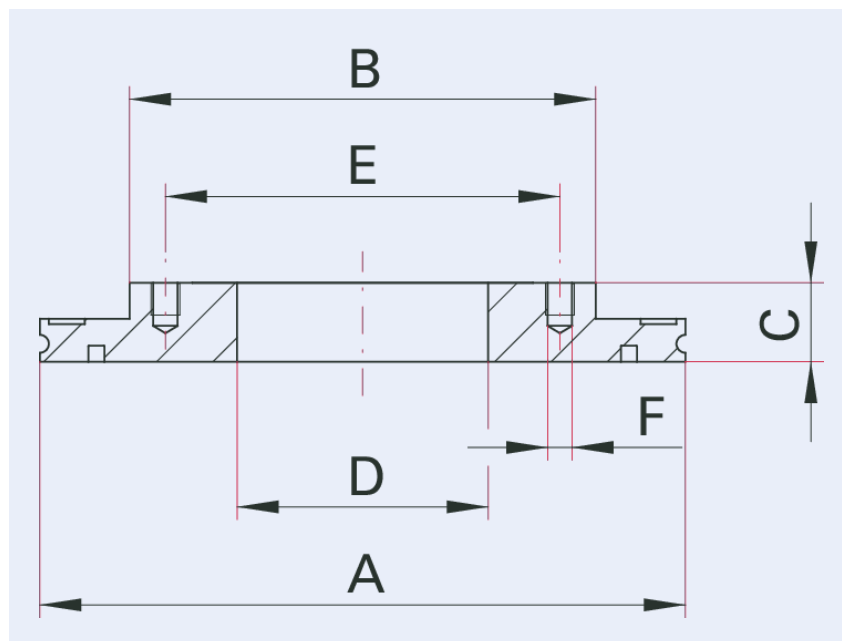

A	240 mm
B	165 mm
C	20 mm
D	102 mm
E	145 mm
F	M8

Technical Data	Adapter flange, stainless steel 304/1.4301, DN 200 ISO-K/100 ISO-F
Materials in contact with media	Stainless steel 1.4301 (AISI 304)
Number of screws	8 Pieces
Nominal diameter reduced	DN 100 ISO-F
Temperature range	196 – 300 °C
Connection flange	DN 200 ISO-K / DN 100 ISO-F
Pressure range	1 · 10 ⁻⁸ hPa – 5 · 10 ² hPa over pressure (elastomer seal); 1 · 10 ⁻⁹ hPa – 5 · 10 ² hPa over pressure (metal seal)
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Adapter flange, stainless steel 304/1.4301, DN 200 ISO-K/100 ISO-F
Adapter flange, stainless steel 304/1.4301, DN 200 ISO-K/100 ISO-F	320FLR200-100

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 