




**Full nipple, stainless
steel 304/1.4301,
DN 100 ISO-K**

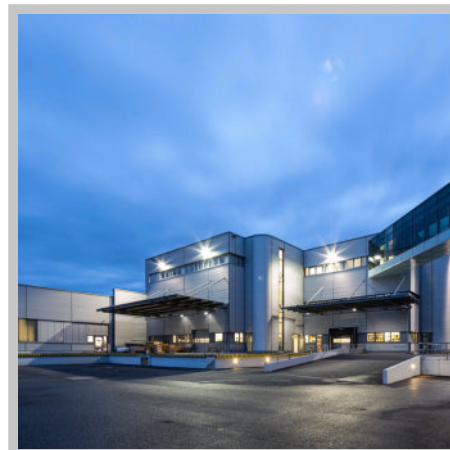

PFEIFFER 


Full nipple



Illustration only

Full nipple, stainless steel 304/1.4301, DN 100 ISO-K

Dimensions

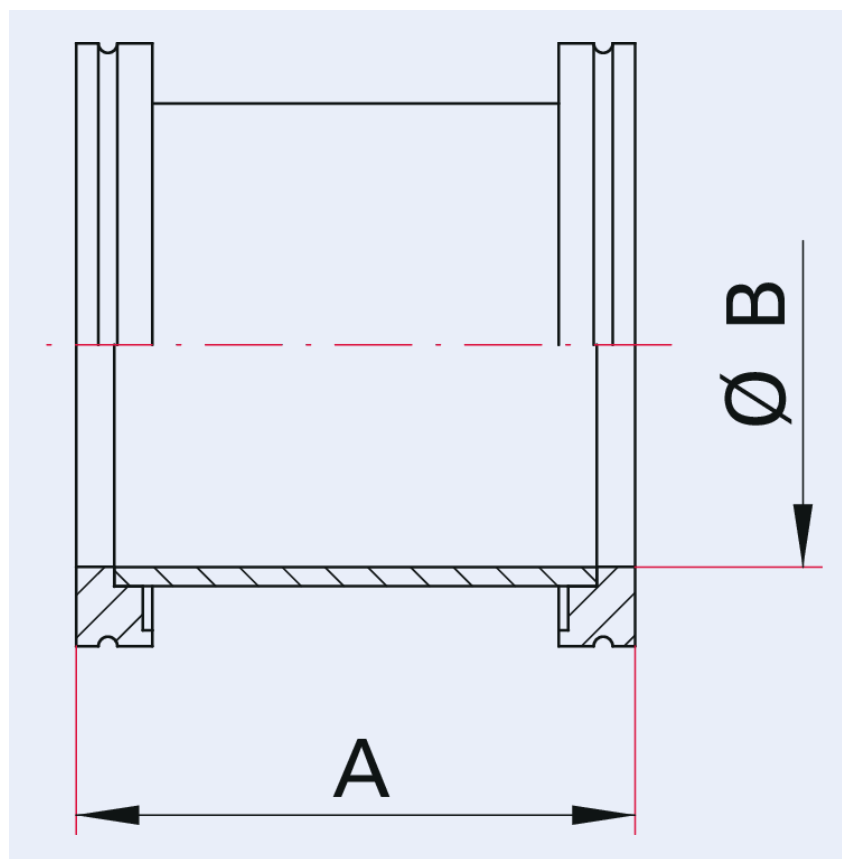

A	108 mm
B	102 mm

Technical Data	Full nipple, stainless steel 304/1.4301, DN 100 ISO-K
Materials in contact with media	Stainless steel 1.4301 (AISI 304)
Temperature range	196 – 300 °C
Connection flange	DN 100 ISO-K
Pressure range	$1 \cdot 10^{-8}$ hPa – $5 \cdot 10^2$ hPa over pressure (elastomer seal); $1 \cdot 10^{-9}$ hPa – $5 \cdot 10^2$ hPa over pressure (metal seal)
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Full nipple, stainless steel 304/1.4301, DN 100 ISO-K
Full nipple, stainless steel 304/1.4301, DN 100 ISO-K	320RZS100

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 