



**Viewport, stainless  
steel / borosilicate,  
DN 100 ISO-K**

---



**PFEIFFER** 

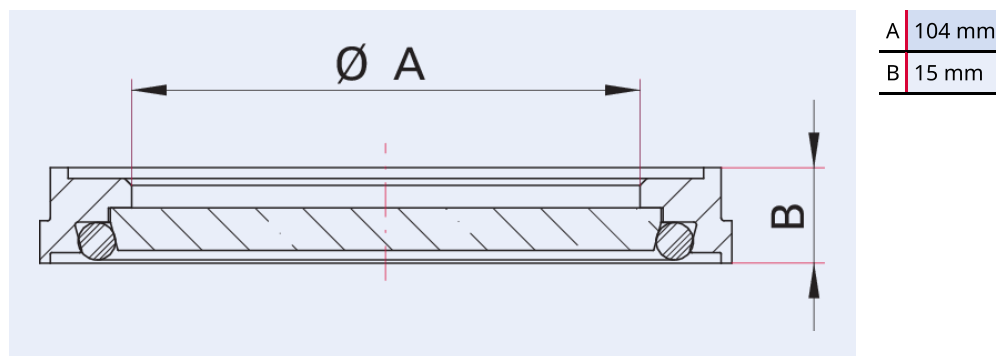


Illustration only

## Viewport, stainless steel / borosilicate, DN 100 ISO-K

- Frame with integrated FKM O-ring, installation without additional seal
- Circumferential rim for outer centering on the ISO-K counter flange
- Not suitable for mounting on base plate or with ISO-F flange
- Caution! Risk of injury by glass splinters. Do not use viewports which show apparent damage

## Dimensions



| Technical Data             | Viewport, stainless steel / borosilicate, DN 100 ISO-K           |
|----------------------------|--|
| Temperature range          | 15 – 150 °C  |
| Heat up and cool down rate | ≤5 K/min   |
| Connection flange          | DN 100 ISO-K   |
| Pressure range             | 1 · 10 <sup>-8</sup> hPa – 5 · 10 <sup>2</sup> hPa over pressure |
| Material                   | Stainless steel / Borosilicate                                   |
| Temperature range max.     | 150 °C   302 °F   423.15 K                                       |
| Temperature range min.     | 15 °C   5 °F   258.15 K  |

| Order number  | Viewport, stainless steel / borosilicate,<br>DN 100 ISO-K |
|---|---|
| Viewport, stainless steel / borosilicate,<br>DN 100 ISO-K | 322GSG100   |

Are you looking for an optimum vacuum solution?  
Talk to us:  
**Pfeiffer Vacuum Components & Solutions GmbH Germany**  
**T +49 551 99963-0**  
**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 