




**Centering ring with
screen, stainless steel,
FKM, DN 80 ISO-K**

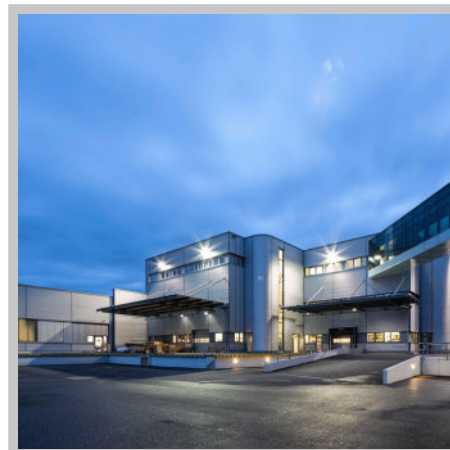

PFEIFFER 

Centering ring with screen

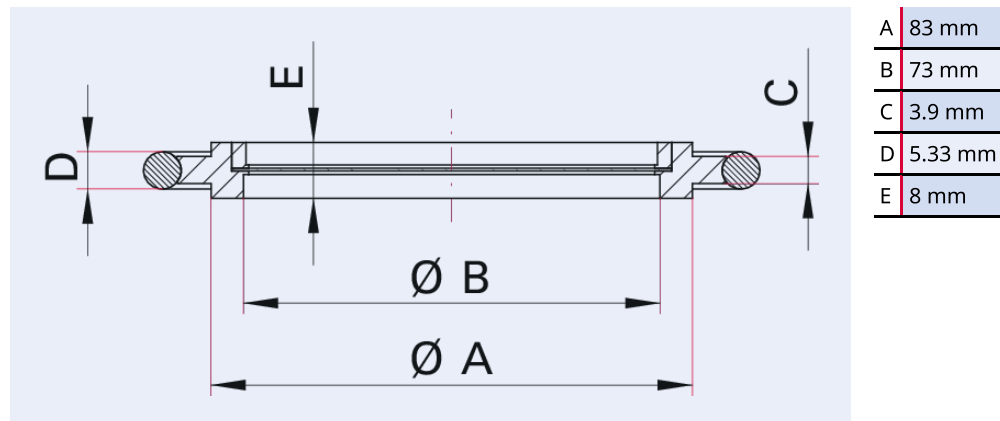


Illustration only

Centering ring with screen, stainless steel, FKM, DN 80 ISO-K

- Not to be used for the installation of turbo pumps! Use the fastening elements given in the corresponding operating instructions.

Dimensions



Technical Data

Centering ring with screen, stainless steel, FKM, DN 80 ISO-K	
Materials in contact with media	Stainless steel 1.4301 (AISI 304)
Temperature range	15 – 150 °C
Wire thickness	0.2 mm 0.01 inch
Connection flange	DN 80 ISO-K
Temperature range max.	150 °C 302 °F 423.15 K
Temperature range min.	15 °C 5 °F 258.15 K

Order number	Centering ring with screen, stainless steel, FKM, DN 80 ISO-K
Centering ring with screen, stainless steel, FKM, DN 80 ISO-K	322ZRD080

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 