



Bracket screw, zinc-plated steel, DN 63-250 ISO-K



PFEIFFER 

Bracket screw

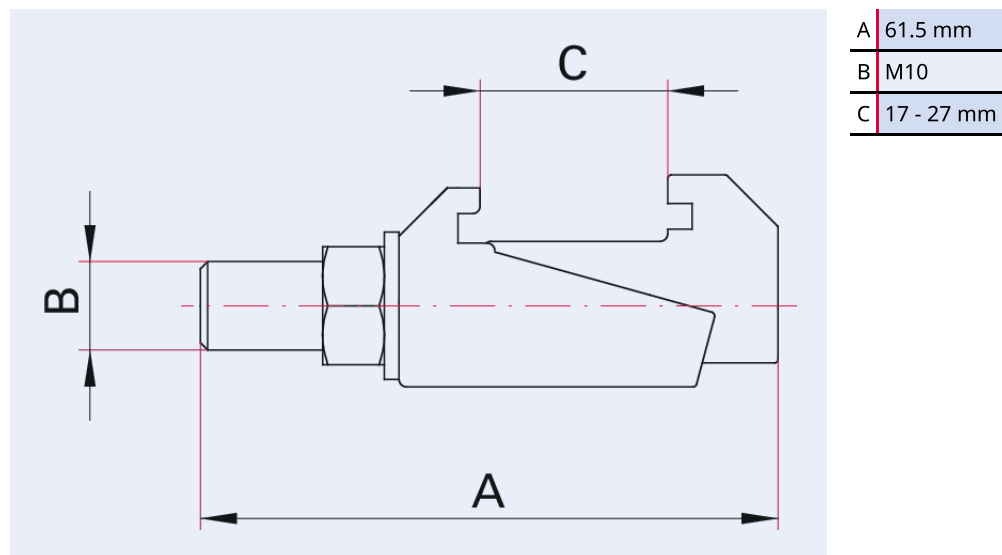


Illustration only

Bracket screw, zinc-plated steel, DN 63-250 ISO-K

- Suitable for use with metal and elastomer seals
- Not to be used for the installation of turbo pumps! Use the fastening elements given in the corresponding operating instructions.

Dimensions



Technical Data	Bracket screw, zinc-plated steel, DN 63-250 ISO-K
Temperature range	0 – 200 °C
Connection flange	DN 63 – DN 250 ISO-K
Torque	DN 63 – 250:12 N m – 16 N m DN 320 – 630: –
Material	Zinc-plated steel
Temperature range max.	200 °C 392 °F 473.15 K
Temperature range min.	0 °C 32 °F 273.15 K

Order number	Bracket screw, zinc-plated steel, DN 63-250 ISO-K
Bracket screw, zinc-plated steel, DN 63-250 ISO-K	350BKL250

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 