



**Welding flange,
rotatable, stainless
steel 304L, DN 250 CF, 3
mm**



PFEIFFER 


Welding flange, rotatable



Illustration only

Welding flange, rotatable, stainless steel 304L, DN 250 CF, 3 mm

Dimensions

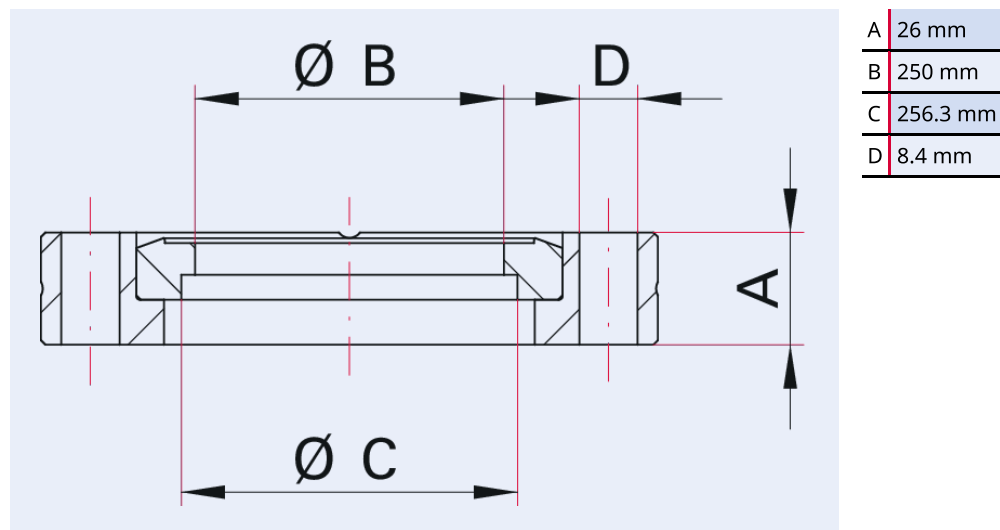

Technical Data

Welding flange, rotatable, stainless steel 304L, DN 250 CF, 3 mm	
Materials in contact with media	Stainless steel (AISI 304L)
Number of screws	32 Pieces
Pipe dimension	256 mm × 3 mm
Temperature range	196 – 300 °C
Connection flange	DN 250 CF
Pressure range	1 · 10 ⁻¹² hPa – to ambient pressure
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Welding flange, rotatable, stainless steel 304L, DN 250 CF, 3 mm
Welding flange, rotatable, stainless steel 304L, DN 250 CF, 3 mm	420FAD250-256

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 