



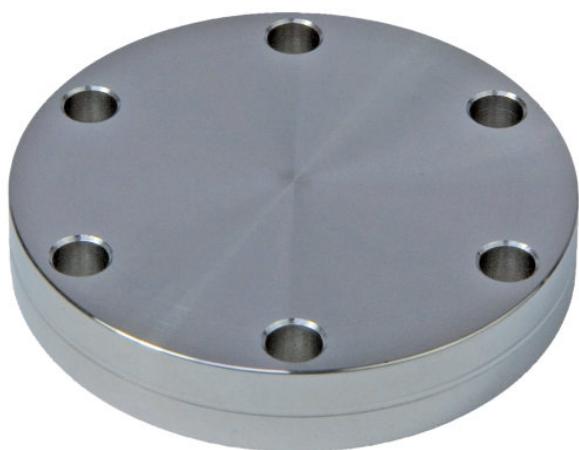

**Blank flange, with
metric thread, stainless
steel 304L, DN 100 CF**

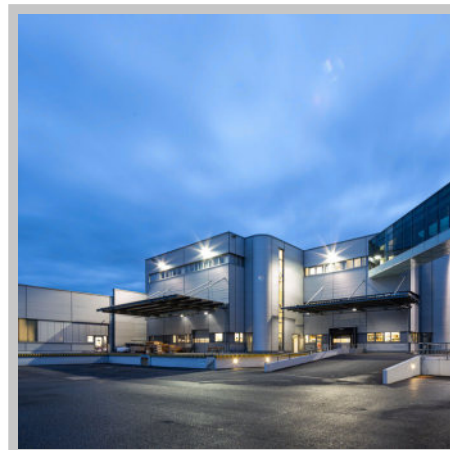

PFEIFFER 





Illustration only

Blank flange, with metric thread, stainless steel 304L, DN 100 CF

Dimensions

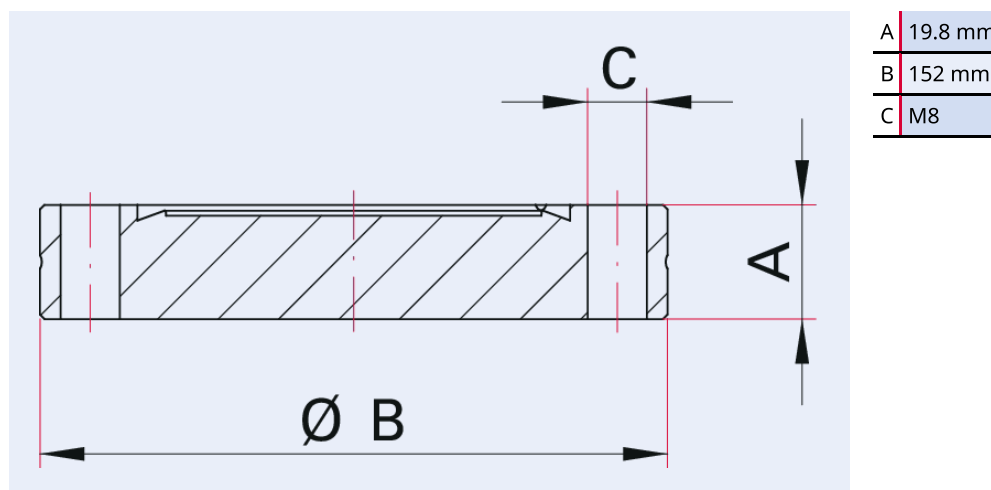

Technical Data

Blank flange, with metric thread, stainless steel 304L, DN 100 CF	
Materials in contact with media	Stainless steel (AISI 304L)
Number of screws	16 Pieces
Thread	M 8
Temperature range	196 – 300 °C
Connection flange	DN 100 CF
Pressure range	1 · 10 ⁻¹² hPa – to ambient pressure
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Blank flange, with metric thread, stainless steel 304L, DN 100 CF
Blank flange, with metric thread, stainless steel 304L, DN 100 CF	420FBL100-G

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 