



**Spacer flange with bore
holes, stainless steel
304L, DN 16 CF**

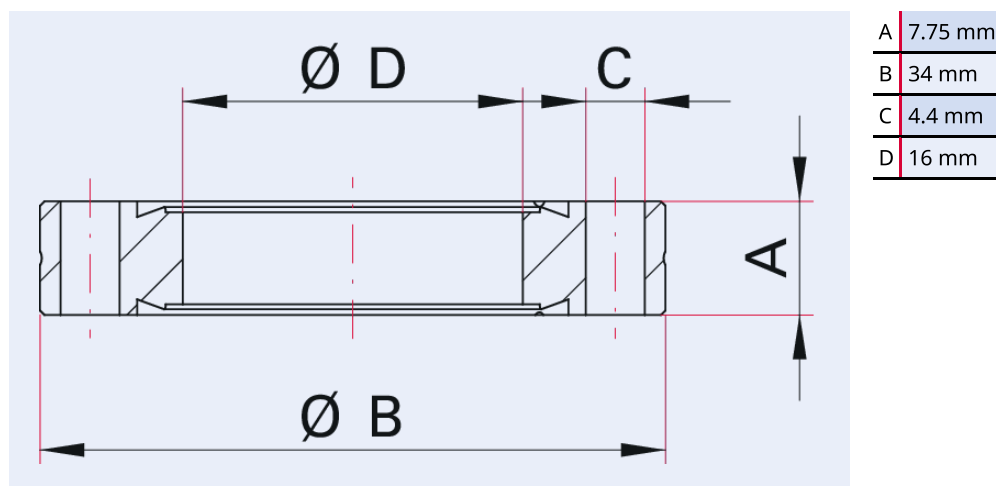




Illustration only

Spacer flange with bore holes, stainless steel 304L, DN 16 CF

Dimensions



Technical Data

Spacer flange with bore holes, stainless steel 304L, DN 16 CF

Materials in contact with media	Stainless steel (AISI 304L)
Number of screws	6 Pieces
Temperature range	196 – 300 °C
Connection flange	DN 16 CF
Pressure range	1 · 10 ⁻¹² hPa – to ambient pressure
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Spacer flange with bore holes, stainless steel 304L, DN 16 CF
Spacer flange with bore holes, stainless steel 304L, DN 16 CF	420FDI016

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 