



**Spacer flange with bore
holes, stainless steel
304L, DN 100 CF**



PFEIFFER 


Spacer flange



Illustration only

Spacer flange with bore holes, stainless steel 304L, DN 100 CF

Dimensions

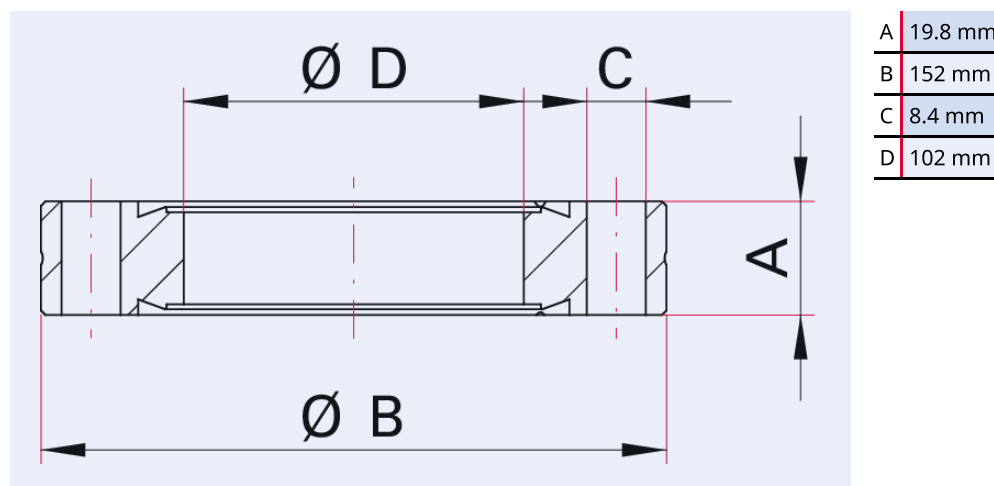

Technical Data

Spacer flange with bore holes, stainless steel 304L, DN 100 CF

Materials in contact with media	Stainless steel (AISI 304L)
Number of screws	16 Pieces
Temperature range	196 – 300 °C
Connection flange	DN 100 CF
Pressure range	1 · 10 ⁻¹² hPa – to ambient pressure
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Spacer flange with bore holes, stainless steel 304L, DN 100 CF
Spacer flange with bore holes, stainless steel 304L, DN 100 CF	420FDI100

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 