



**Weld-on flange,
stainless steel 304L,
DN 40 CF**



PFEIFFER 

Weld-on flange

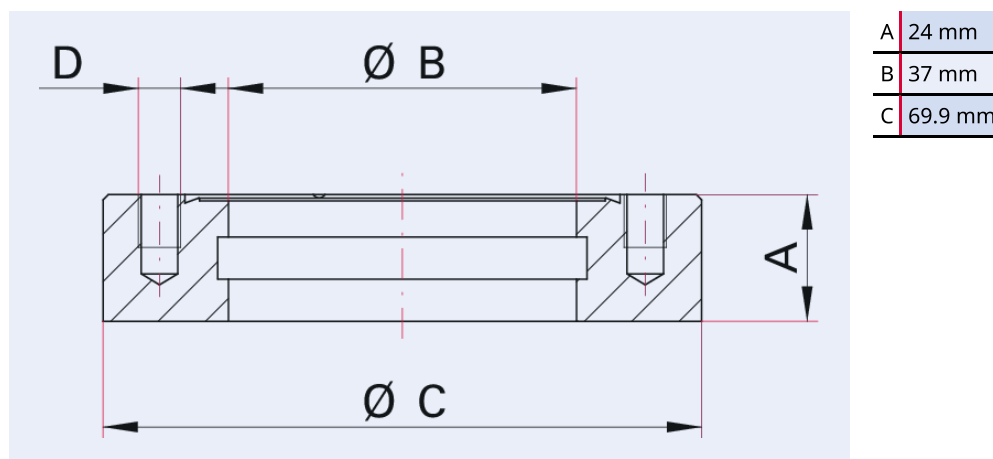


Illustration only

Weld-on flange, stainless steel 304L, DN 40 CF

- Flange for welding to a flat panel or a round chamber/tube
- Other flange materials on request

Dimensions



Technical Data	Weld-on flange, stainless steel 304L, DN 40 CF
Materials in contact with media	Stainless steel (AISI 304L)
Number of screws	6 Pieces
Thread	M 6
Temperature range	196 – 300 °C
Thread depth	10 mm 0.39 inch
Connection flange	DN 40 CF
Pressure range	$1 \cdot 10^{-12}$ hPa – to ambient pressure
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Weld-on flange, stainless steel 304L, DN 40 CF
Weld-on flange, stainless steel 304L, DN 40 CF	420FES040

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 