



**Viewport, stainless
steel / fused silica, UV,
DN 16 CF**



PFEIFFER 

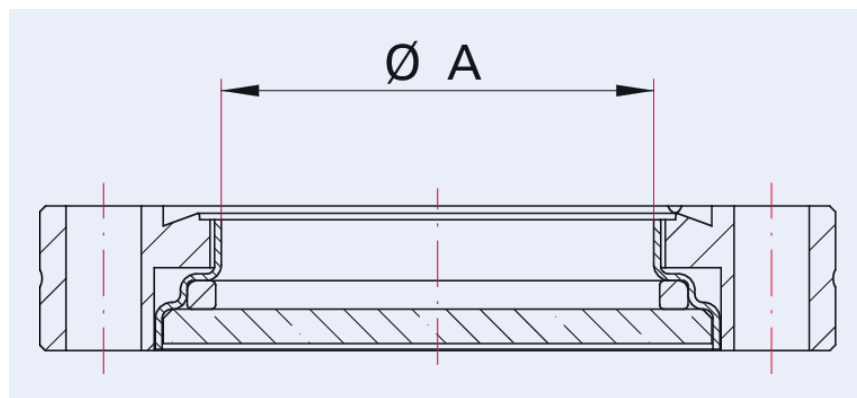


Illustration only

Viewport, stainless steel / fused silica, UV, DN 16 CF

- Please use annealed copper gaskets or elastomer seals to minimize stress inside the glass
- Always use washers for installation
- Flange sizes DN 16 to DN 250 compatible with ISO 3669:2020
- Caution! Risk of injury by glass splinters. Do not use viewports which show apparent damage

Dimensions



A 16 mm

Technical Data	Viewport, stainless steel / fused silica, UV, DN 16 CF
Temperature range	100 – 200 °C
Heat up and cool down rate	≤20 K/min
Connection flange	DN 16 CF
Pressure range	1 · 10 ⁻¹¹ hPa – to ambient pressure
Material	Stainless steel / Fused Silica (Synthetic Amorphous Quartz)
Temperature range max.	200 °C 392 °F 473.15 K
Temperature range min.	100 °C 148 °F 173.15 K

Order number	Viewport, stainless steel / fused silica, UV, DN 16 CF
Viewport, stainless steel / fused silica, UV, DN 16 CF	420GSG016-silica-uv

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 