



**Quick-access door, with  
viewport, DN 63 CF**

---

**PFEIFFER** 

# Quick-Access door, with sight glass

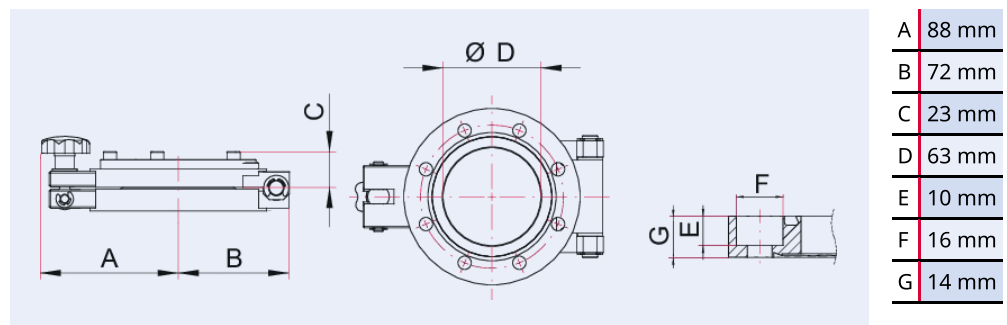


Illustration only

## Quick-access door, with viewport, DN 63 CF

- Screw holes: Through-holes with counter-bore for cylinder head
- Can be installed using hexagon socket screws

## Dimensions



## Technical Data

## Quick-access door, with viewport, DN 63 CF

Materials in contact with media	Stainless steel
Number of screws	8 Pieces
Seal	FKM
O-ring material	FKM
Temperature range	15 – 150 °C
Sight glass	Borosilicate glass
Connection flange	DN 63 CF
Pressure range	1 · 10 <sup>-8</sup> hPa – to ambient pressure
Temperature range max.	150 °C   302 °F   423.15 K
Temperature range min.	15 °C   59 °F   288.15 K

Order number	Quick-access door, with viewport, DN 63 CF
Quick-access door, with viewport, DN 63 CF	420KTU063-G

Are you looking for an optimum vacuum solution?  
Talk to us:  
**Pfeiffer Vacuum Components & Solutions GmbH Germany**  
**T +49 551 99963-0**  
**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 