

**Port aligner for angular
and linear adjustment,
stainless steel,
DN 40 CF**



PFEIFFER 

Port aligner

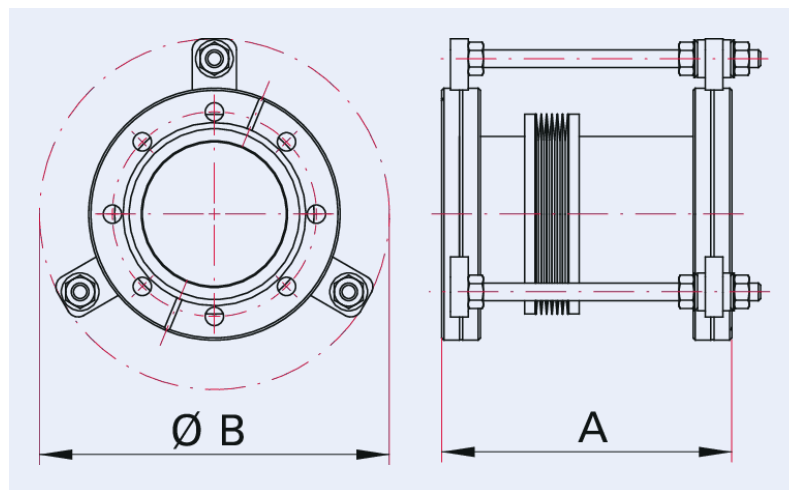


Illustration only

Port aligner for angular and linear adjustment, stainless steel, DN 40 CF

- Ball joints for easy angular adjustment
- Adjustment angle: 3 °
- Maximum angle and stroke simultaneously usable
- Flanges with through holes

Dimensions



A	105 - 115 mm
B	115 mm

Technical Data	Port aligner for angular and linear adjustment, stainless steel, DN 40 CF
Operating temperature	-15 – 80 °C
Mounting orientation	Arbitrary
Axial stroke	±5 mm ±0.2 inch
Tightness	<1 · 10 ⁻¹¹ Pa m ³ /s <7.5 · 10 ⁻¹¹ Torr l/s <1 · 10 ⁻¹⁰ mbar l/s
Connection flange	DN 40 CF
Pressure range	1 · 10 ⁻¹⁰ hPa – 5 · 10 ² hPa over pressure
Material	Stainless steel (bellows 316L, flange and tube 304L, holders 304)

Order number	Port aligner for angular and linear adjustment, stainless steel, DN 40 CF
Port aligner for angular and linear adjustment, stainless steel, DN 40 CF	420MPA040

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 