





XYZ-Axis precision manipulator, 150 mm stroke, stainless steel, DN 40 CF





XY-Axis manipulator

210 - 360 mm 450 mm 82 mm

321 mm

63.5 mm

232 mm

PFEIFFER

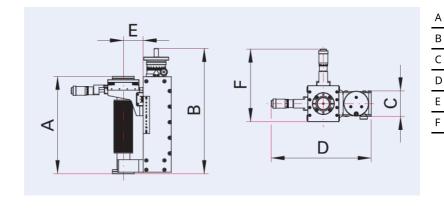


Illustration only

XYZ-Axis precision manipulator, 150 mm stroke, stainless steel, DN 40 CF

- Compact design for precise 3-axis manipulation
- Z-axis: Recirculating ball bearing guides and recirculating ball screw drive
- XY-axis: precision cross roller guides
- Zero backlash and no slip-stick effect
- Guide and drive are wear-free and maintenance-free
- Extremely stable design concept minimizes position offset due to pressure changes
- XY-axis micrometer screws with big knobs easy to handle and easy to read
- Brake for z-axis prevents independent movement
- Connection flange with through holes, traversable flange with threaded holes

Dimensions



Technical Data	XYZ-Axis precision manipulator, 150 mm stroke, stainless steel, DN 40 CF
Pitch of ball screw drive	2 mm/Rotation
Operating temperature	-15 – 80 °C
Precision	< 5 μm (XY-axis)
Mounting orientation	Arbitrary
Tightness	<1 · 10 ⁻¹¹ Pa m ³ /s <7.5 · 10 ⁻¹¹ Torr l/s <1 · 10 ⁻¹⁰ mbar l/s
X/Y-deflection	±12.5 mm ±0.49 inch
Stroke	150 mm 5.905515 inch
Resolution	5 μm
Repeatable precision	5 μm
Connection flange	DN 40 CF
Pressure range	1 · 10 ⁻¹⁰ hPa – to ambient pressure
Inner diameter	38 mm
Material	Bellows: stainless steel 316L, flange and tube: stainless steel 304L, housing: stainless steel 304, XY-unit: aluminum anodized

Order number	XYZ-Axis precision manipulator, 150 mm stroke, stainless steel, DN 40 CF
XYZ-Axis precision manipulator, 150 mm stroke, stainless steel, DN 40 CF	420MXYZ040-150







Are you looking for an optimum vacuum solution?

Talk to us:

Pfeiffer Vacuum Components & Solutions GmbH Germany

T +49 551 99963-0

info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



https://webportal.pfeiffer-vacuum.com/global/en/contact

Follow Us On Social Media #pfeiffervacuum











www.pfeiffer-vacuum.com

