

Reducer cross piece, stainless steel 304L, DN 63-40 CF



PFEIFFER 

Reducing cross piece

PFEIFFER 

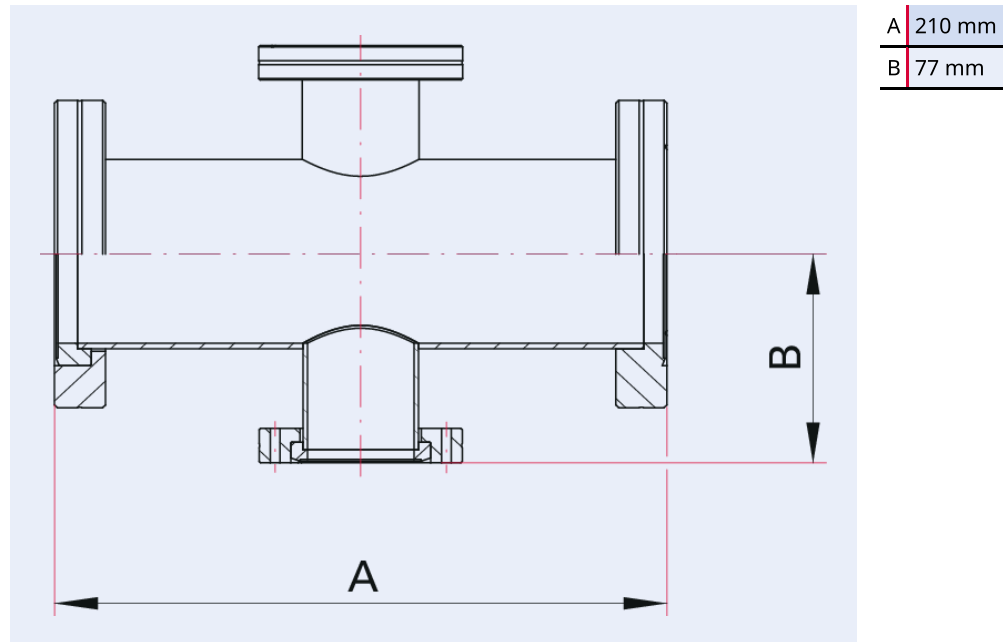


Illustration only

Reducer cross piece, stainless steel 304L, DN 63-40 CF

- One rotatable flange per axis
- Pipe surface: glass-bead blasted (polished version on request)
- Other flange and tube materials on request

Dimensions



| Technical Data | Reducer cross piece, stainless steel 304L, DN 63-40 CF |
|--------------------------|---|
| Nominal diameter reduced | DN 40 CF |
| Temperature range | 196 – 300 °C |
| Tightness | 1 · 10 ⁻¹¹ Pa m ³ /s 7.5 · 10 ⁻¹¹ Torr l/s 1 · 10 ⁻¹⁰ mbar l/s |
| Connection flange | DN 63 CF – DN 40 CF |
| Pressure range | 1 · 10 ⁻¹² hPa – to ambient pressure |
| Material | Flange: stainless steel 304L; tube: stainless steel 304L or better |
| Temperature range max. | 300 °C 572 °F 573.15 K |
| Temperature range min. | 196 °C 320.8 °F 77.15 K |

| Order number | Reducer cross piece, stainless steel 304L, DN 63-40 CF |
|---|---|
| Reducer cross piece, stainless steel 304L, DN 63-40 CF | 420RKR063-040 |

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 