



**Corrugated hose,
flexible, stainless steel,
DN 63 CF, length 500
mm**



PFEIFFER 

Corrugated hose

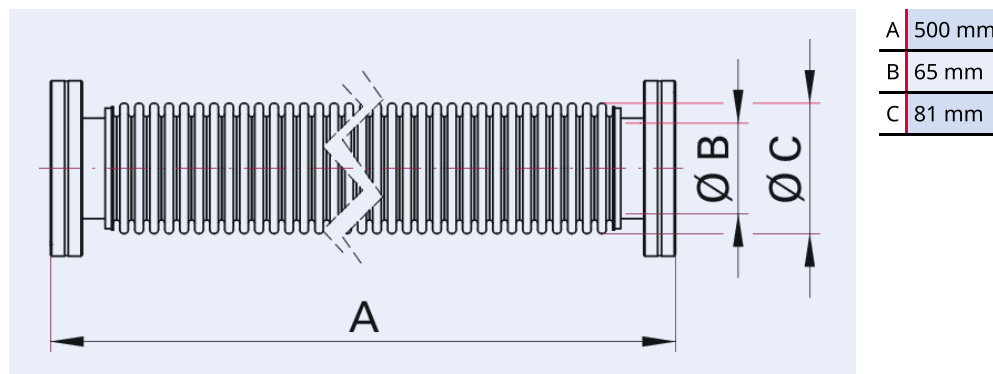


Illustration only

Corrugated hose, flexible, stainless steel, DN 63 CF, length 500 mm

- One flange rotatable
- Custom lengths on request

Dimensions



| Technical Data | Corrugated hose, flexible, stainless steel, DN 63 CF, length 500 mm |
|-----------------------------------|--|
| Temperature range | 196 – 300 °C |
| Bending radius, frequent movement | 330 mm 12.99 inch |
| Bending radius, one-time movement | 90 mm 3.54 inch |
| Connection flange | DN 63 CF |
| Pressure range | $1 \cdot 10^{-9}$ hPa – to ambient pressure |
| Material | Stainless steel: Flange 304L, Bellows 316L |
| Temperature range max. | 300 °C 572 °F 573.15 K |
| Temperature range min. | 196 °C 320.8 °F 77.15 K |

| Order number | Corrugated hose, flexible, stainless steel, DN 63 CF, length 500 mm |
|--|--|
| Corrugated hose, flexible, stainless steel, DN 63 CF, length 500 mm | 420SWN063-0500 |

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 