



**Corrugated hose,
flexible, stainless steel,
DN 63 CF, length 1000
mm**



PFEIFFER 

Corrugated hose

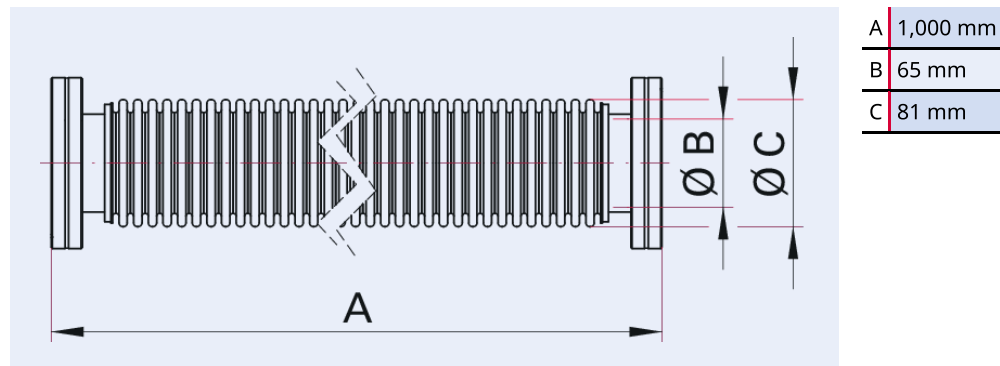


Illustration only

Corrugated hose, flexible, stainless steel, DN 63 CF, length 1000 mm

- One flange rotatable
- Custom lengths on request

Dimensions



Technical Data

Corrugated hose, flexible, stainless steel, DN 63 CF, length 1000 mm

Temperature range	196 – 300 °C
Bending radius, frequent movement	330 mm 12.99 inch
Bending radius, one-time movement	90 mm 3.54 inch
Connection flange	DN 63 CF
Pressure range	1 · 10 ⁻⁹ hPa – to ambient pressure
Material	Stainless steel: Flange 304L, Bellows 316L
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Corrugated hose, flexible, stainless steel, DN 63 CF, length 1000 mm
Corrugated hose, flexible, stainless steel, DN 63 CF, length 1000 mm	420SWN063-1000

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 