

**Fluid feedthrough,  
double tube, stainless  
steel, DN 40 CF**

---



**PFEIFFER** 

# Fluid feedthrough, single tube

PFEIFFER ➤

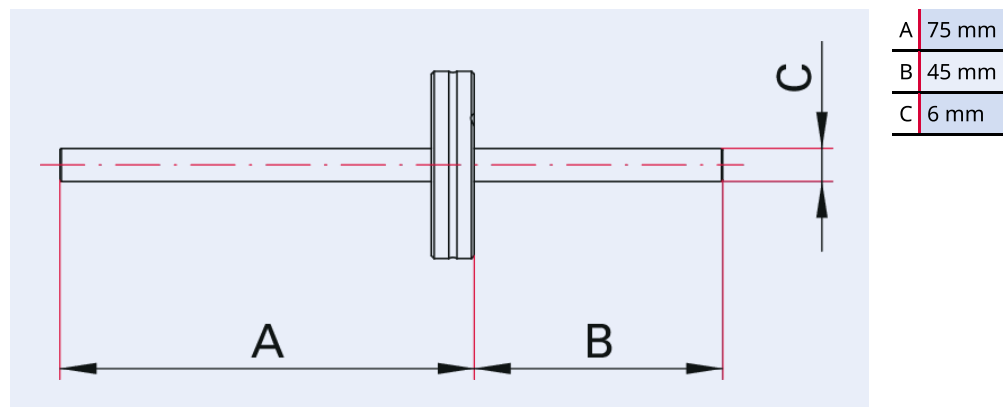


Illustration only

## Fluid feedthrough, double tube, stainless steel, DN 40 CF

- Flange material: Stainless steel
- P = tube end

## Dimensions



Technical Data	Fluid feedthrough, double tube, stainless steel, DN 40 CF
Materials in contact with media	Stainless steel
Temperature range (vacuum side)	196 – 300 °C
Vacuum side	P
Atmosphere side	P
Tightness	$1 \cdot 10^{-11}$ Pa m <sup>3</sup> /s   $7.5 \cdot 10^{-11}$ Torr l/s   $1 \cdot 10^{-10}$ mbar l/s
Connection flange	DN 40 CF
Pressure range	$1 \cdot 10^{-11}$ hPa – to ambient pressure

Order number	Fluid feedthrough, double tube, stainless steel, DN 40 CF
Fluid feedthrough, double tube, stainless steel, DN 40 CF	420XFL040-PP

Are you looking for an optimum vacuum solution?  
Talk to us:  
**Pfeiffer Vacuum Components & Solutions GmbH Germany**  
**T +49 551 99963-0**  
**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 