




UHV Cube, stainless steel 316L/1.4404, DN 40 CF

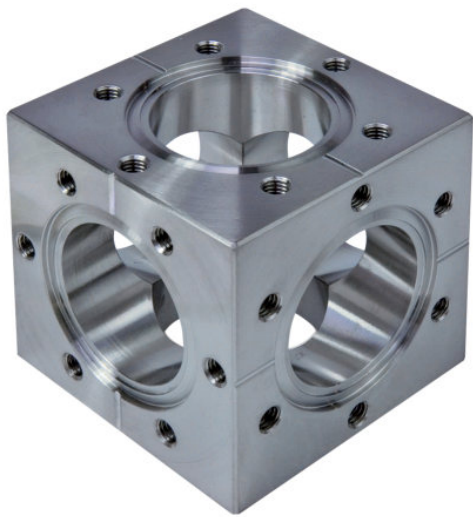

PFEIFFER 

UHV Cube





Illustration only

UHV Cube, stainless steel 316L/1.4404, DN 40 CF

- Manufactured from solid material

Dimensions

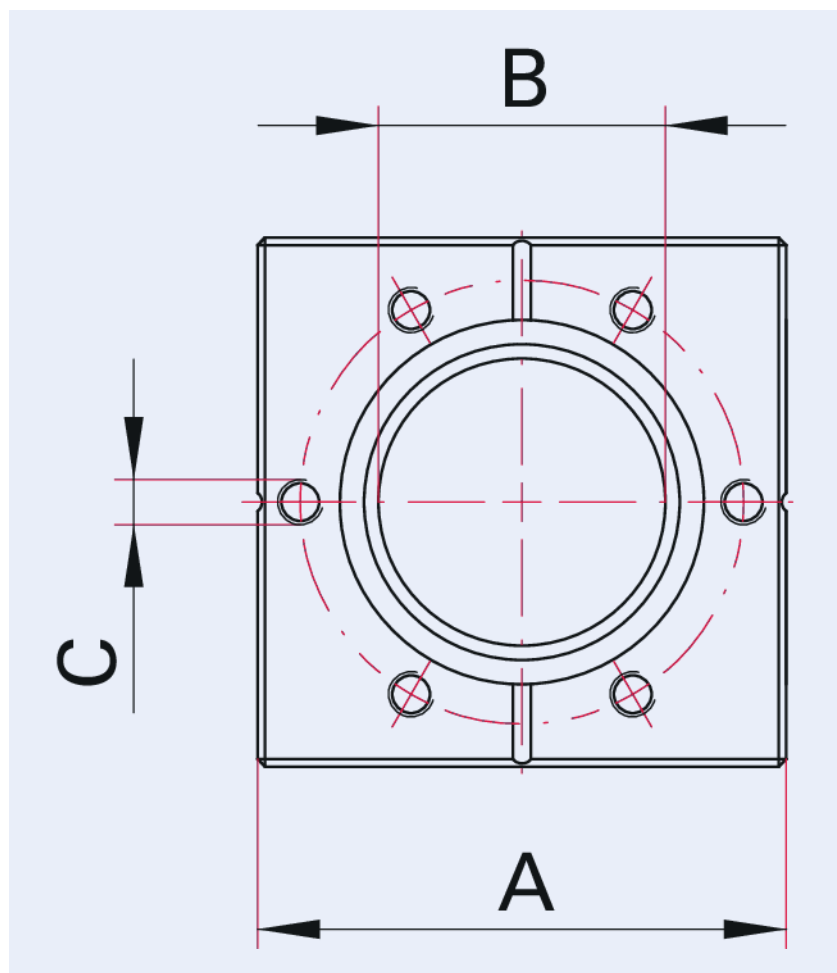

A	70.5 mm
B	38 mm
C	M6

Technical Data	UHV Cube, stainless steel 316L/1.4404, DN 40 CF
Materials in contact with media	Stainless steel 1.4404 (AISI 316L)
Number of screws	6 Pieces
Thread	M 6
Temperature range	196 – 300 °C
Thread depth	8 mm 0.31 inch
Connection flange	DN 40 CF
Pressure range	$1 \cdot 10^{-12}$ hPa – to ambient pressure
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	UHV Cube, stainless steel 316L/1.4404, DN 40 CF
UHV Cube, stainless steel 316L/1.4404, DN 40 CF	470RKK040

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 