


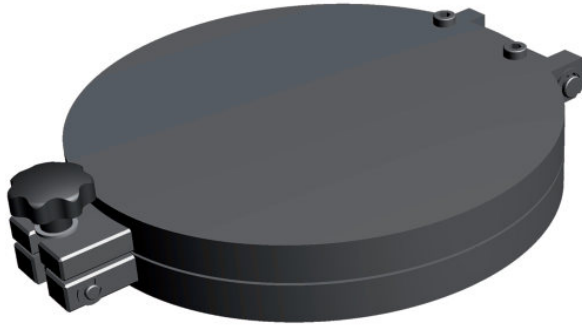

**Quick-Access door,
without sight glass,
stainless steel
304/1.4301, DN 63 ISO-F**

PFEIFFER 

Quick-Access door, without sight glass





Illustration only

Quick-Access door, without sight glass, stainless steel 304/1.4301, DN 63 ISO-F

- Screw holes: Through-holes with counter-bore for cylinder head
- Can be installed using hexagon socket screws

Dimensions

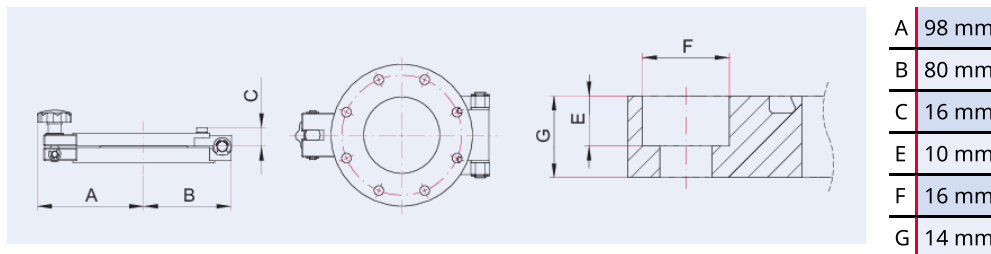

Technical Data

Technical Data	Quick-Access door, without sight glass, stainless steel 304/1.4301, DN 63 ISO-F
Materials in contact with media	Stainless steel 1.4301 (AISI 304)
Number of screws	8 Pieces
Seal	FKM
O-ring material	FKM
Temperature range	15 – 130 °C
Connection flange	DN 63 ISO-F
Pressure range	1 · 10 ⁻⁸ hPa – to ambient pressure
Temperature range max.	130 °C 266 °F 403.15 K
Temperature range min.	15 °C 5 °F 258.15 K

Order number	Quick-Access door, without sight glass, stainless steel 304/1.4301, DN 63 ISO-F
Quick-Access door, without sight glass, stainless steel 304/1.4301, DN 63 ISO-F	520KTU063

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 