



**Butterfly valve,
manually actuated,
DN 63 ISO-F, stainless
steel**



PFEIFFER 

Butterfly valve

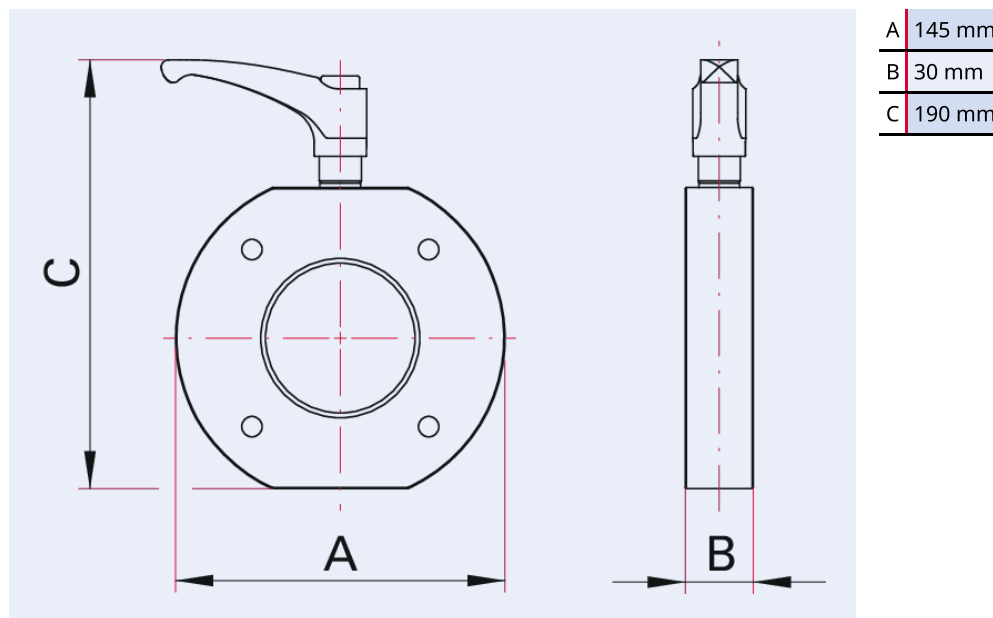


Illustration only

Butterfly valve, manually actuated, DN 63 ISO-F, stainless steel

- Swivel valve plate with FKM seal
- Valve position indicated by handle
- Nearly free clearance in open position
- In the open position, the valve disc protrudes app. 19 mm from the valve on both sides
- Double valve head seal made from FKM
- Service life: 3000 operating cycles

Dimensions



| Technical Data | Butterfly valve, manually actuated, DN 63 ISO-F, stainless steel |
|------------------------|--|
| Seal | FKM |
| Type | Butterfly valve |
| Temperature range | 15 – 130 °C |
| Housing | Stainless steel |
| Actuator | Manual |
| Tightness | 1 · 10 ⁻¹⁰ Pa m ³ /s 7.5 · 10 ⁻¹⁰ Torr l/s 1 · 10 ⁻⁹ mbar l/s |
| Connection flange | DN 63 ISO-F |
| Pressure range | 1 · 10 ⁻⁸ hPa – to ambient pressure |
| Temperature range max. | 130 °C 266 °F 403.15 K |
| Temperature range min. | 15 °C 5 °F 258.15 K |

| Order number | Butterfly valve, manually actuated, DN 63 ISO-F, stainless steel |
|---|---|
| Butterfly valve, manually actuated, DN 63 ISO-F, stainless steel | 520VSM063 |

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 