




# Copper wire seal, OF copper (Annealed), DN 400 COF

---

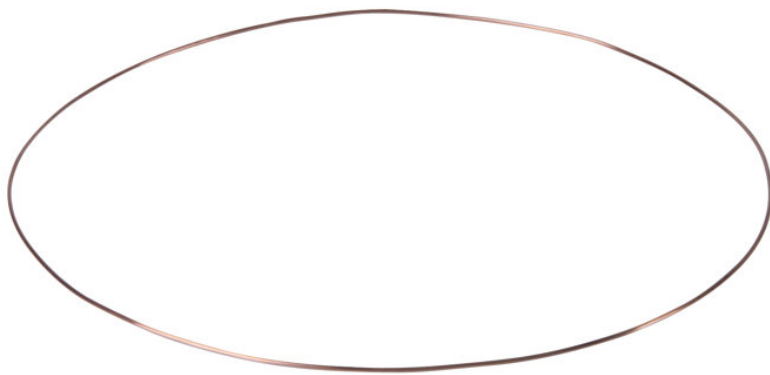

**PFEIFFER** 

# Metal seal

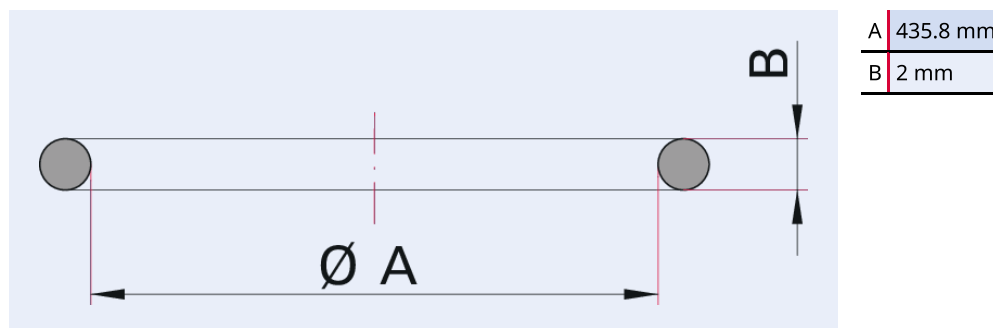


Illustration only

## Copper wire seal, OF copper (Annealed), DN 400 COF

- For single use only

### Dimensions



| Technical Data                  | Copper wire seal, OF copper (Annealed), DN 400 COF |
|---------------------------------|----------------------------------------------------|
| Materials in contact with media | OF Copper (Annealed)                               |
| Temperature range               | 196 – 200 °C                                       |
| Connection flange               | DN 400 COF                                         |
| Pressure range                  | 1 · 10 <sup>-12</sup> hPa – to ambient pressure    |
| Temperature range max.          | 200 °C   392 °F   473.15 K                         |
| Temperature range min.          | 196 °C   320.8 °F   77.15 K                        |

| Order number                                       | Copper wire seal, OF copper (Annealed), DN 400 COF |
|----------------------------------------------------|----------------------------------------------------|
| Copper wire seal, OF copper (Annealed), DN 400 COF | 690DDR400                                          |

Are you looking for an optimum vacuum solution?  
Talk to us:  
**Pfeiffer Vacuum Components & Solutions GmbH Germany**  
**T +49 551 99963-0**  
**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 