




Copper wire seal, OF copper (Annealed), DN 500 COF

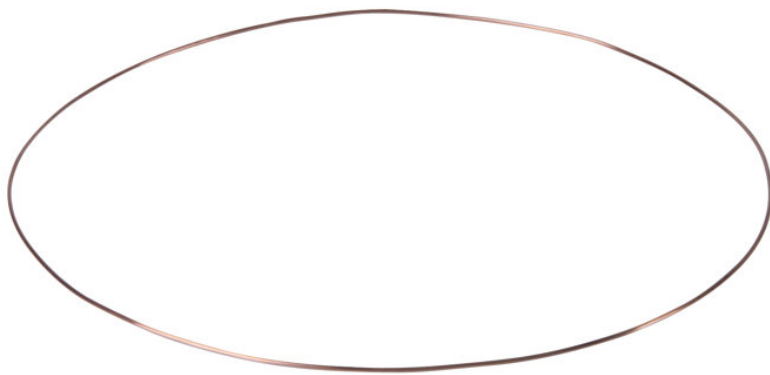

PFEIFFER 

Metal seal

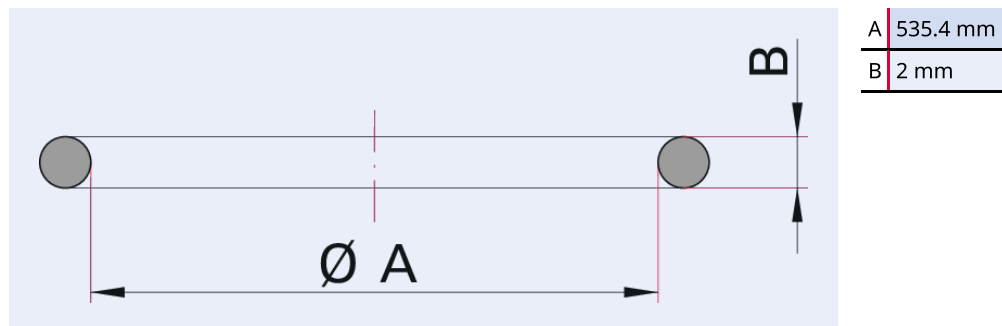


Illustration only

Copper wire seal, OF copper (Annealed), DN 500 COF

- For single use only

Dimensions



Technical Data	Copper wire seal, OF copper (Annealed), DN 500 COF
Materials in contact with media	OF Copper (Annealed)
Temperature range	196 – 200 °C
Connection flange	DN 500 COF
Pressure range	1 · 10 ⁻¹² hPa – to ambient pressure
Temperature range max.	200 °C 392 °F 473.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	Copper wire seal, OF copper (Annealed), DN 500 COF
Copper wire seal, OF copper (Annealed), DN 500 COF	690DDR500

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 