



High vacuum chamber, cubical, KBH, DN 300



PFEIFFER 

High vacuum chamber

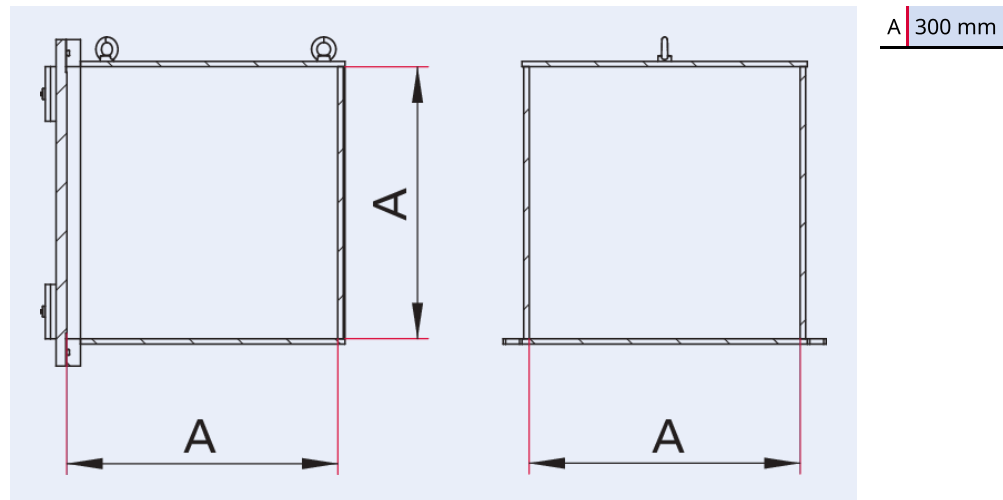


Illustration only

High vacuum chamber, cubical, KBH, DN 300

- Cubical chamber body
- Hinged door and FKM seal
- Surface: inside and outside glass bead blasted
- Chamber with mounting straps and ring bolts
- Chamber ports available (accessories)
- Feet available separately (accessories)

Dimensions



Technical Data

High vacuum chamber, cubical, KBH, DN 300

Temperature range	15 – 150 °C
Tightness	$<1 \cdot 10^{-9} \text{ Pa m}^3/\text{s}$ $<7.5 \cdot 10^{-9} \text{ Torr l/s}$ $<1 \cdot 10^{-8} \text{ mbar l/s}$
Connection flange	DN 300
Pressure range	$1 \cdot 10^{-7} \text{ hPa}$ – to ambient pressure
Material	Chamber body made from stainless steel 304 (1.4301); stainless steel door
Temperature range max.	150 °C 302 °F 423.15 K
Temperature range min.	15 °C 5 °F 258.15 K

Order number	High vacuum chamber, cubical, KBH, DN 300
High vacuum chamber, cubical, KBH, DN 300	820KBH0300-S

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 