



**CF port, fixed port, with
thread, stainless steel
304L, DN 40 CF**




PFEIFFER 



Illustration only

CF port, fixed port, with thread, stainless steel 304L, DN 40 CF

Dimensions

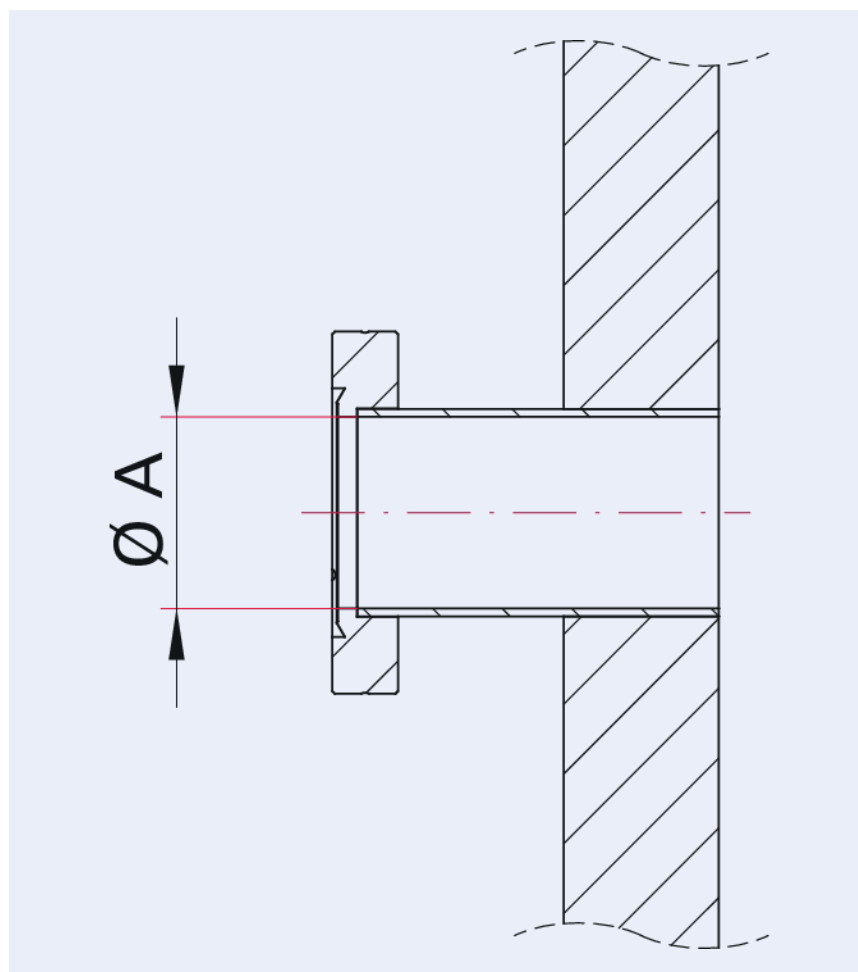

A 37 mm

Technical Data	CF port, fixed port, with thread, stainless steel 304L, DN 40 CF
Materials in contact with media	Stainless steel (AISI 304L)
Temperature range	196 – 300 °C
Connection flange	DN 40 CF
Pressure range	$<1 \cdot 10^{-12}$ hPa – to ambient pressure
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	CF port, fixed port, with thread, stainless steel 304L, DN 40 CF
CF port, fixed port, with thread, stainless steel 304L, DN 40 CF	820KPC040-G

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 