



**CF port, fixed port,
rotatable, stainless
steel 304L, DN 75 CF**



PFEIFFER 

CF port


PFEIFFER 



Illustration only

CF port, fixed port, rotatable, stainless steel 304L, DN 75 CF

Dimensions

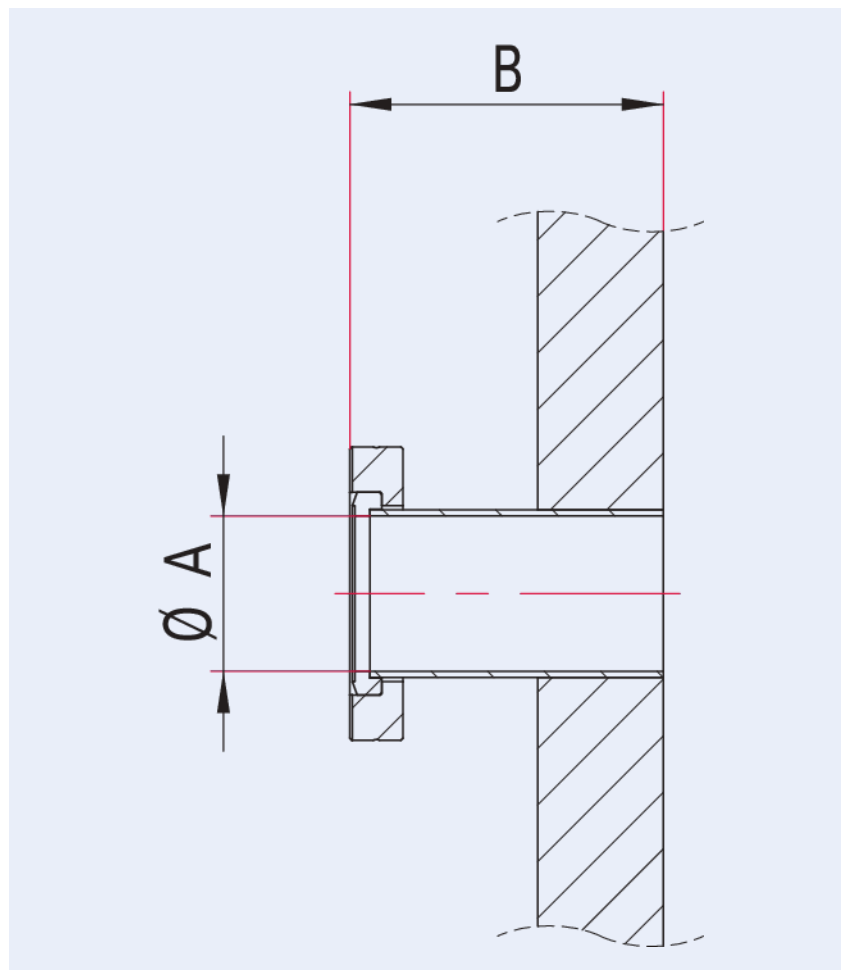

A | 72.1 mm

Technical Data	CF port, fixed port, rotatable, stainless steel 304L, DN 75 CF
Materials in contact with media	Stainless steel (AISI 304L)
Temperature range	196 – 300 °C
Connection flange	DN 75 CF
Pressure range	$<1 \cdot 10^{-12}$ hPa – to ambient pressure
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	CF port, fixed port, rotatable, stainless steel 304L, DN 75 CF
CF port, fixed port, rotatable, stainless steel 304L, DN 75 CF	820KPD075

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 