



**CF port, fixed port,
rotatable, with thread,
stainless steel 304L,
DN 160 CF**




PFEIFFER 



Illustration only

CF port, fixed port, rotatable, with thread, stainless steel 304L, DN 160 CF

Dimensions

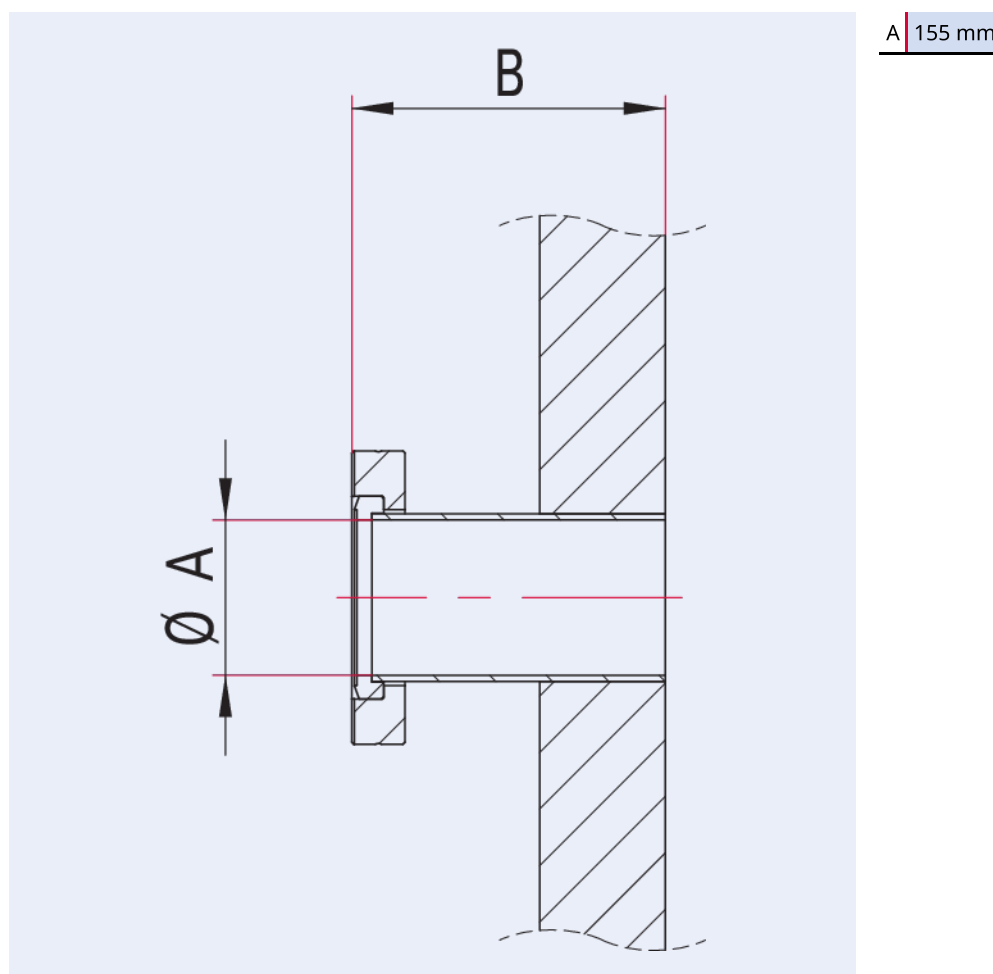

Technical Data	CF port, fixed port, rotatable, with thread, stainless steel 304L, DN 160 CF
Materials in contact with media	Stainless steel (AISI 304L)
Temperature range	196 – 300 °C
Connection flange	DN 160 CF
Pressure range	$<1 \cdot 10^{-12}$ hPa – to ambient pressure
Temperature range max.	300 °C 572 °F 573.15 K
Temperature range min.	196 °C 320.8 °F 77.15 K

Order number	CF port, fixed port, rotatable, with thread, stainless steel 304L, DN 160 CF
CF port, fixed port, rotatable, with thread, stainless steel 304L, DN 160 CF	820KPD160-G

Are you looking for an optimum vacuum solution?
Talk to us:
Pfeiffer Vacuum Components & Solutions GmbH Germany
T +49 551 99963-0
info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media
#pfeiffervacuum



www.pfeiffer-vacuum.com

PFEIFFER 