





Tube compression fitting, stainless steel 304/1.4301, DN 25 ISO-KF





Tube compression fitting

PFEIFFER

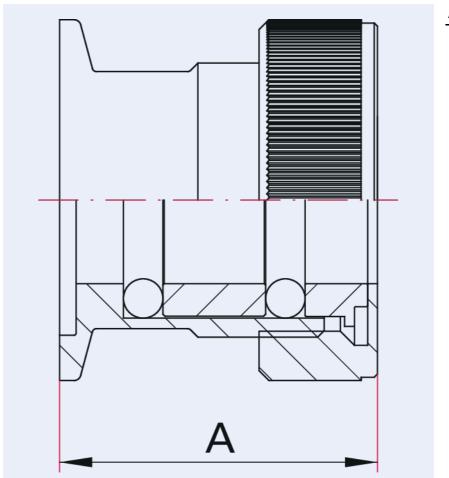


Illustration only

Tube compression fitting, stainless steel 304/1.4301, DN 25 ISO-KF

- Tube can be fed through
- Manual opening and closing
- Double-sealed with FKM O-rings

Dimensions



Technical Data	Tube compression fitting, stainless steel 304/1.4301, DN 25 ISO-KF
Materials in contact with media	Stainless steel 1.4301 (AISI 304)
Tube diameter	16 mm
Pipe external diameter	16 mm
O-ring material	FKM
Temperature range	15 – 130 °C
Connection flange	DN 25 ISO-KF
Pressure range	1 · 10 ⁻⁷ hPa – to ambient pressure
Temperature range max.	130 °C 266 °F 403.15 K
Temperature range min.	15 °C 5 °F 258.15 K

A 45 mm

Cirder niimner	Tube compression fitting, stainless steel 304/1.4301, DN 25 ISO-KF
Tube compression fitting, stainless steel 304/1.4301, DN 25 ISO-KF	120XQV025-16







Are you looking for an optimum vacuum solution? Talk to us: **Pfeiffer Vacuum Components & Solutions GmbH Germany** T +49 551 99963-0 info-cs@pfeiffer-vacuum.com

Or scan the barcode, to visit our web page:



https://webportal.pfeiffer-vacuum.com/global/en/contact

Follow Us On Social Media #pfeiffervacuum













www.pfeiffer-vacuum.com

