



**Bellows, stainless steel:  
flange 304; bellows  
1.4571, DN 200 ISO-K**

---



**PFEIFFER** 

# Spring bellows

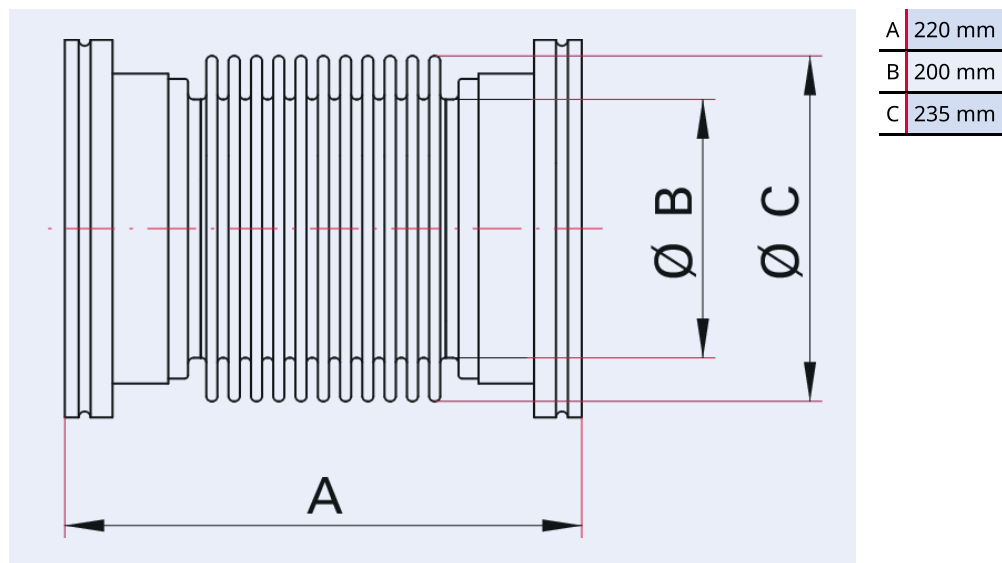


Illustration only

**Bellows, stainless steel: flange 304; bellows 1.4571, DN 200 ISO-K**

- Flange connection length: 30 mm
- Custom lengths on request

## Dimensions



| Technical Data         | Bellows, stainless steel: flange 304; bellows 1.4571, DN 200 ISO-K                                                                                               |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature range      | 196 – 300 °C                                                                                                                                                     |
| Axial stroke           | ±25 mm   ±0.98 inch                                                                                                                                              |
| Tightness              | 1 · 10 <sup>-11</sup> Pa m <sup>3</sup> /s   7.5 · 10 <sup>-11</sup> Torr l/s   1 · 10 <sup>-10</sup> mbar l/s                                                   |
| Connection flange      | DN 200 ISO-K                                                                                                                                                     |
| Pressure range         | 1 · 10 <sup>-8</sup> hPa – 5 · 10 <sup>2</sup> hPa over pressure (elastomer seal); 1 · 10 <sup>-9</sup> hPa – 5 · 10 <sup>2</sup> hPa over pressure (metal seal) |
| Material               | Stainless steel (flange: 304; bellows: DN 63 to DN 100 and DN 320: 316L; DN 160 to DN 250: 1.4571)                                                               |
| Temperature range max. | 300 °C   572 °F   573.15 K                                                                                                                                       |
| Temperature range min. | 196 °C   320.8 °F   77.15 K                                                                                                                                      |

| Order number                                                       | Bellows, stainless steel: flange 304; bellows 1.4571, DN 200 ISO-K |
|--------------------------------------------------------------------|--------------------------------------------------------------------|
| Bellows, stainless steel: flange 304; bellows 1.4571, DN 200 ISO-K | 320SFK200-220                                                      |

Are you looking for an optimum vacuum solution?  
Talk to us:  
**Pfeiffer Vacuum Components & Solutions GmbH Germany**  
**T +49 551 99963-0**  
**info-cs@pfeiffer-vacuum.com**

Or scan the barcode, to visit our web page:



<https://webportal.pfeiffer-vacuum.com/global/en/contact>



Errors and/or changes excepted. - 5/14/2025

Follow Us On Social Media  
#pfeiffervacuum



[www.pfeiffer-vacuum.com](http://www.pfeiffer-vacuum.com)

**PFEIFFER** 